

International Low Impact Docking System (iLIDS) Project Technical Requirements Specification

System Architecture and Integration Office
Engineering Directorate

For correct version go to:

<https://pds.jsc.nasa.gov/Windchill/netmarkets/jsp/folder/view.jsp?oid=folder%7Ewt.folder.SubFolder%3A352419524&u8=1>

January 2012
Revision G



National Aeronautics and Space Administration
Lyndon B. Johnson Space Center
Houston, Texas 77058

International Low Impact Docking System (iLIDS) Project Technical Requirements Specification

Prepared by:

/s/ James L. Lewis 1-4-2012
James L. Lewis Date
Project Manager, EA3

Approved by:

/s/ Gregg C. Baumer 1/10/12
Gregg C. Baumer Date
S&MA Integration Manager, NT311

/s/ Bruce W. Sauser 1-10-12
Bruce Sauser Date
Systems Architecture and Integration Office, Manager, EA3-1

/s/ Caris A. Hatfield 1/4/2012
Caris (Skip) A. Hatfield Date
NDSP Project Manager, OA

Change Record

Status	Revision No.	Change No.	Description	Release Date
Baseline			Baseline (Reference CR/D 000180/2-1,dated 9/24/07 also includes CAR 000180,dated 10/01/07)	10/17/07
Revision	A		Revision A (Reference CR/D CEV-00109, dated 05/13/2008)	9/26/08
Revision	B		Revision B (Rewrite based on change from Orion specific docking system to NASA Docking System (NDS) compliant with emerging International Docking System Standard (IDSS). Requirements validated via NDS Baseline Review comments and dispositions incorporated herein. See Appendix C-4 for a complete listing of changes.	10/15/10
Revision	C		Revision C (Removal of Export Administration Regulations (EAR) Notice)	11/15/10
Revision	D		ITAR statement added. See Appendix C-5 for a complete listing of changes.	1/26/11
Revision	E		See Appendix C-5 for a complete listing of changes.	3/15/11
Revision	F		Post-CDR updates. See Appendix C-5 for a complete listing of requirement changes.	8/15/11
Revision	G		Editorial and grammatical updates throughout. Added 28 Vdc to Host Vehicle Electrical Power Interface. Increased values for iLIDS Command Processing Latency and Fault Response Performance. Updated separation system demate energy range and defined initial conditions. Added new requirements for undocking pressure and HCS compressive force resistance. Reinstated requirement for iLIDS-to-Host Vehicle Electrical Interface. Updated iLIDS Mating Interface Allowable Thermal Differential. Added magnet striker plate rotational compliance. See Appendix C-5 for a complete listing of changes.	1/6/12

TABLE OF CONTENTS

1	INTRODUCTION.....	1
1.1	Purpose and Scope	1
1.2	Responsibility and Change Authority	1
2	APPLICABLE AND REFERENCE DOCUMENTS.....	2
2.1	Applicable Documents	2
2.2	Reference Documents	4
2.3	Order of Precedence.....	4
3	REQUIREMENTS	5
3.1	International Low Impact Docking System General Requirements	5
3.1.1	iLIDS GFE Description.....	5
3.1.2	iLIDS Interface Requirements.....	6
3.1.2.1	iLIDS-to-Host Vehicle Interface	7
3.1.2.2	iLIDS-to-iLIDS Interface	15
3.1.2.3	iLIDS-to-EVA Interface	19
3.2	Characteristics	23
3.2.1	Functional Performance.....	23
3.2.1.1	Docking	23
3.2.1.2	Undocking	26
3.2.2	Physical	28
3.2.2.1	Mass.....	28
3.2.2.2	Dimensions/Volume	29
3.2.3	Environmental.....	29
3.2.3.1	Thermal.....	30
3.2.3.1.1	iLIDS-to-iLIDS Thermal Docking Interface.....	30
3.2.3.1.2	iLIDS-to-Vehicle Thermal Docking Interface.....	30
3.2.3.2	Pressure.....	31
3.2.3.3	Vibration.....	31
3.2.3.4	Acceleration.....	31
3.2.3.5	Shock	32
3.2.3.6	Electromagnetic Interference/Electromagnetic Compatibility	32
3.2.3.7	Humidity	32
3.2.3.8	Acoustic Emissions	32
3.2.3.9	Meteoroids and Orbital Debris.....	32
3.2.3.10	Atomic Oxygen	33
3.2.3.11	External Contamination	33
3.2.3.12	Ionizing Radiation.....	33
3.2.3.13	Lightning.....	34
3.2.3.14	Solar Ultraviolet Radiation	34
3.2.3.15	Vacuum	34
3.2.4	Reliability	35
3.2.4.1	Failure Tolerance	35
3.2.4.2	Failure Propagation	36
3.2.4.3	Failure Detection, Isolation, and Recovery.....	37
3.2.5	Maintainability.....	37
3.2.6	Transportability	37

3.2.6.1	Ground Transportability	37
3.2.7	JPR 8080.5 - JSC Design and Procedural Standards	37
3.3	Design and Construction.....	37
3.3.1	Materials, Processes and Parts	38
3.3.1.1	Materials and Processes	38
3.3.1.2	Electrical, Electronic and Electromechanical Parts.....	39
3.3.2	Structural Design	40
3.3.3	Nameplates and Product Marking	40
3.3.4	Workmanship.....	41
3.3.5	Human Engineering.....	42
3.3.5.1	Strength.....	42
3.3.5.2	Natural and Induced Environment.....	42
3.3.5.3	IVA Crew Safety	43
3.3.6	Safety	45
3.3.7	Operational Lifetime	47
3.3.8	Electrical Parts and System Design, Construction, and Verification	48
3.4	Logistics.....	48
3.4.1	Maintenance	48
3.4.1.1	On-Orbit Maintenance	48
3.4.1.2	Ground Maintenance.....	48
4	GROUND SUPPORT EQUIPMENT REQUIREMENTS.....	49
4.1	Ground Support Equipment Interface Definition.....	49
4.2	GSE Requirements	50
4.2.1	General.....	50
4.2.2	Ground Support and Transportation	50
4.2.3	Ground Crew Interfaces.....	50
5	PREPARATION FOR DELIVERY	51
5.1	Preservation.....	51
5.1.1	General Preservation Requirements	51
5.2	Packing	51
5.2.1	General Packing Requirements.....	51
5.2.2	Detailed Packing Requirements	51
5.3	Marking and Labeling.....	51
5.3.1	General Marking and Labeling Requirements	51
5.3.1.1	Unit Packages, Intermediate Packages, and Exterior Shipping	51
5.3.1.2	Hazardous Materials	51
5.3.1.3	Detailed Marking and Labeling Requirements.....	52
6	CUSTOMER IMPOSED VERIFICATION REQUIREMENTS	53
7	NOTES / ERRATA	54
APPENDIX A	ACRONYMS AND ABBREVIATIONS	A-1
APPENDIX B	DEFINITION OF TERMS.....	B-1
APPENDIX C	MISCELLANEOUS INFORMATION.....	C-1

LIST OF FIGURES

Figure 3.1-1 - iLIDS-301 6
 Figure 3.1-2 - iLIDS System Interface Diagram..... 7
 Figure 3.1-3 - iLIDS-to-Host Vehicle Interface Diagram 8
 Figure 4.1-1 - iLIDS to GSE Interface Diagram 49

LIST OF TABLES

Table 2.1-1 - Applicable Documents 2
 Table 2.2-1 - Reference Documents 4
 Table 3.1-1 - Host Vehicle Electrical Power Interface 9
 Table 3.2-1 - Failure Tolerance Allocation..... 36
 Table 3.3-1 - Seal Redundancy and Verifiability 46
 Table C-1 - Compliance Document Applicability C-1
 Table C-2 - To Be Resolved/Determined/Specified (TBR/D/S) Items C-11
 Table C-3 - iLIDS Configuration Applicability C-12
 Table C-4 - iLIDS PTRS/IDD Associative Requirements..... C-17
 Table C-5 - iLIDS Requirements Revision From/To Comparison..... C-19
 Table C-6 - iLIDS JPR 8080.5 Compliance Requirements Revision From/To
 Comparison..... C-28

1 INTRODUCTION

1.1 Purpose and Scope

The NASA Docking System (NDS) is NASA's implementation for the emerging International Docking System Standard (IDSS) using low impact docking technology. The NASA Docking System Project (NDSP) is the International Space Station (ISS) Program's project to produce the NDS and its complimentary ISS-installed NDS compatible interface. The NDS design evolved from the Low Impact Docking System (LIDS). The acronym international Low Impact Docking System (iLIDS) is also used to describe this system as well as the Government Furnished Equipment (GFE) project designing the NDS for the NDSP. NDS and iLIDS may be used interchangeably. This document will use the acronym iLIDS. Some of the heritage documentation and implementations (e.g., software command names, requirement identification (ID), figures, etc.) used on NDS will continue to use the LIDS acronym.

This specification defines the technical requirements for the iLIDS GFE delivered to the NDSP by the iLIDS project. This document contains requirements for two iLIDS configurations, SEZ29101800-301 and SEZ29101800-302. Requirements with the statement, "iLIDS shall", are for all configurations. Examples of requirements that are unique to a single configuration may be identified as "iLIDS (-301) shall" or "iLIDS (-302) shall". Furthermore, to allow a requirement to encompass all configurations with an exception, the requirement may be designated as "iLIDS (excluding -302) shall".

Verification requirements for the iLIDS project are identified in the Verification Matrix (VM) provided in the iLIDS Verification and Validation Document, JSC-63966.

The following definitions differentiate between requirements and other statements:

Shall:	This is the only verb used for the binding requirements.
Should/May:	These verbs are used for stating non-mandatory goals.
Will:	This verb is used for stating facts or declaration of purpose.

A "Definition of Terms" table is provided in Appendix B to define those terms with specific tailored uses in this document.

1.2 Responsibility and Change Authority

This document is prepared and maintained in accordance with EA-WI-023, Project Management of GFE Flight Projects. The responsibility for the development of this document lies with the Systems Architecture and Integration Office (EA3). The NDS Project Office will serve as the change authority.

2 APPLICABLE AND REFERENCE DOCUMENTS

2.1 Applicable Documents

The following documents, of the exact issue and revision shown, form a part of this specification, to the extent specified herein.

Table 2.1-1 - Applicable Documents

Document Number	Revision/ Release Date	Document Title
ANSI/TIA/EIA-422-B	Rev. B 16 Sep. 2005	Electrical Characteristics of Balanced Voltage Digital Interface Circuits
ANSI/TIA/EIA-568-B.2	Rev. B Apr. 2001	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IDSS IDD	Rev. A 13 May 2011	International Docking System Standard (IDSS) Interface Definition Document (IDD)
JPR 8080.5	Rev. A w/Change 1 1 May 2009	JSC Design and Procedural Standards
JPR 8730.2	Baseline Mar. 2008	JSC Fastener Integrity Testing Program
JSC-28918	Baseline Feb. 2005	Extravehicular Activity (EVA) Design Requirements and Considerations
JSC-62809	Rev. D 22 Apr. 2010	Human Rated Spacecraft Pyrotechnic Specification
JSC-64598	Baseline Mar. 2011	iLIDS Ionizing Radiation Control Plan
JSC-64599	Draft Mar. 2011	iLIDS Electric Power Quality Description Document
JSC-64924	Rev. A 15 Aug. 2011	iLIDS Electrical, Electronic and Electromechanical (EEE) Parts Management and Implementation Plan
JSC-65795	Rev. F 15 Dec. 2011	NASA Docking System (NDS) Interface Definition Document (IDD)
JSC-65842	Draft Mar. 2011	iLIDS Electromagnetic, Environmental, Effects (E3) Description Document
JSC-65877	Baseline Jul. 2010	Specification for HNS Explosive
JSC-65970	Rev. B Dec. 2011	iLIDS Thermal and Induced Environments Specification
MIL-STD-1553B	Rev. B, Change Notice 2 2 Sep. 1986	Department of Defense Interface Standard for Digital Time Division Command/Response Multiplex Data Bus

Document Number	Revision/ Release Date	Document Title
NASA-STD-4003	Baseline 8 Sep. 2003	Electrical Bonding for NASA Launch Vehicles, Spacecraft, Payloads, and Flight Equipment
NASA-STD-5005	Rev. C 13 Mar. 2009	Standard for the Design and Fabrication of Ground Support Equipment
NASA-STD-5017	Baseline 13 Jun. 2006	Design and Development Requirements for Mechanisms
NASA-STD-5019	Baseline 7 Jan. 2008	Fracture Control Requirements for Spaceflight Hardware
NASA-STD-6016	Baseline 11 Jul. 2008	Standard Material and Processes Requirements for Spacecraft
NASA/TP-2002-210780	Baseline May 2002	The New NASA Orbital Debris Engineering Model ORDEM2000
PRC-9002	Rev. I Jun. 2010	Process Specification for Part Marking
SN-C-0005	Rev. D w/Change 13 13 Feb. 2008	Contamination Control Requirements
SSP 30234	Rev. F, DCN 2 Dec. 2008	Failure Modes and Effects Analysis and Critical Items List Requirements for Space Station
SSP 30309	Rev. F 23 Oct. 2009	Safety Analysis and Risk Assessment Requirements Document
SSP 30425	Rev B 8 Feb. 1994	Space Station Program Natural Environment Definition for Design
SSP 30559	Rev. D 27 Jul. 2007	Structural Design and Verification Requirements
SSP 41172	Rev. AA 8 Apr. 2010	Qualification and Acceptance Environmental Test Requirements
SSP 50005	Rev. E 30 Jun. 2006	International Space Station Flight Crew Integration Standard (NASA-STD-3000/T)
SSP 50021	Baseline with DCN 004 22 Jul. 2009	Safety Requirements Document
SSP 50038	Rev. B 17 Nov. 1995	Computer-Based Control System Safety Requirements
SSP 50254	Rev. N Mar. 2011	International Space Station Program Operations Nomenclature
SSQ 21655	Rev. G 15 Feb. 2005	Cable, Electrical, MIL-STD-1553 Databus, Space Quality, General Specification
Webster's		Webster's New World Dictionary of American English

2.2 Reference Documents

The following documents are reference documents utilized in the development of this specification.

Table 2.2-1 - Reference Documents

Document Number	Revision/Release Date	Document Title
EA-WI-023	Rev. E, DCN-2 Sep. 2010	Project Management of Government Furnished Equipment (GFE) Flight Projects
JSC-27301	Rev. F Aug. 2009	Materials Control Plan for JSC Flight Hardware
JSC-28533	Rev. G Feb. 2011	International Space Station Catalogue of Intravehicular Activity (IVA) Government Furnished Equipment (GFE) Flight Crew Equipment (FCE)
NPR 8705.2	Rev. B w/Change 3 10 Nov. 2011	Human-Rating Requirements for Space Systems
NSTS 07700 Vol. X, Book 2	Rev. M, w/Change No. 257 24 Aug. 2011	Space Shuttle Flight and Ground System Specification, Environment Design, Weight and Performance, and Avionics Events
SSP 30233	Rev. H 21 Aug. 2007	Space Station Requirements for Materials and Processes
SSP 30426	Rev. D 21 Jan. 1994	Space Station External Contamination Control Requirements
SSP 41000	Rev. BV 30 Sep. 2011	System Specification for the International Space Station
SSP 41004	Rev. H 25 Oct. 2005	Common Berthing Mechanism to Pressurized Elements Interface Control Document Part 1
SSP 57000	Rev. L May 2011	Pressurized Payloads Interface Requirements Document

2.3 Order of Precedence

In the event of a conflict between the text of this specification and an applicable document cited herein, the text of this specification takes precedence except for JSC-65795, International Low Impact Docking System (iLIDS) Interface Definition Document (IDD). This document uses the following three methods to invoke requirements from applicable documents:

- The requirement is written directly from the applicable document
- The entire document is invoked as applicable
- An entire document is invoked as applicable with cited exceptions

3 REQUIREMENTS

3.1 International Low Impact Docking System General Requirements

3.1.1 iLIDS GFE Description

The iLIDS mating system supports low approach velocity docking and provides a modular and reconfigurable standard interface, supporting crewed and autonomous vehicles during mating and assembly operations.

The iLIDS is an androgynous peripheral docking system. It facilitates low approach velocity docking via a reconfigurable, active, closed-loop, force-feedback controlled mating system using modern technologies. The iLIDS supports both crewed and autonomous vehicles during mating and assembly operations. In addition, it is modular and reconfigurable for a variety of missions. Future iLIDS configurations will be certified to allow docking at positive, zero, and negative approach velocities, as well as berthing.

The iLIDS system establishes the initial contact of two vehicles through a Soft Capture System (SCS), which uses the low impact docking technology. This system consists of guide petals, magnets, magnetic striker plates, electromechanical actuators in a Stewart Platform configuration, and load sensing rings. During docking soft capture, the guide petals are the first to make contact, transferring contact/load inputs into the load sensing load cells. The load cells provide information to drive the electromechanical actuators to correct lateral and angular misalignment between the two opposing interfaces. Soft capture completes when electromagnetic attachment of the magnets to the striker plates on the opposing capture ring occurs.

The hard capture subsystem uses powered hooks to engage with another iLIDS in passive mode, providing a structural connection ready for pressurization between the mated vehicles that allows for cargo and crew transfer. The Hard Capture System (HCS) consists of a tunnel, 12 active/passive hook pairs, seals, and mechanized separation/umbilicals. The docking is complete when mechanized resource transfer umbilicals are extended and engaged with the spring-load separation system energized for undocking.

The iLIDS is a docking system that can be commanded via iLIDS electronics interface from the host vehicle in either an active mode or a passive mode. Active mode is when the iLIDS commands the soft capture and all sequences of docking. Passive mode is when the iLIDS yields control and allows the iLIDS, in active mode, to mate to it. See the iLIDS figure below.

In support of the NDSP, two iLIDS configurations are used: the iLIDS-301 and the iLIDS-302.

The iLIDS-301 is a standalone assembly with all required hardware (e.g., Micrometeoroid and Orbital Debris (MMOD), electrical boxes, etc.) contained in the assembly. The iLIDS-301 can dock to another iLIDS-301 or to iLIDS-302. Figure 3.1-1 - iLIDS-301 provides a reference view of the iLIDS-301.

The iLIDS-302 has most of the same functionality as the iLIDS-301. The main difference is the electrical boxes are integrated in the host vehicle rather than the

docking system assembly. Hence, the tunnel structure is shorter (i.e. compact). In addition, the iLIDS-302 relies on the host vehicle for MMOD shielding. Further, the iLIDS-302 does not contain a seal on the mating surface which would support longer duration missions. Therefore the iLIDS-302 can only dock to iLIDS-301. However, the iLIDS-302 will not be initially certified to perform powered soft capture.

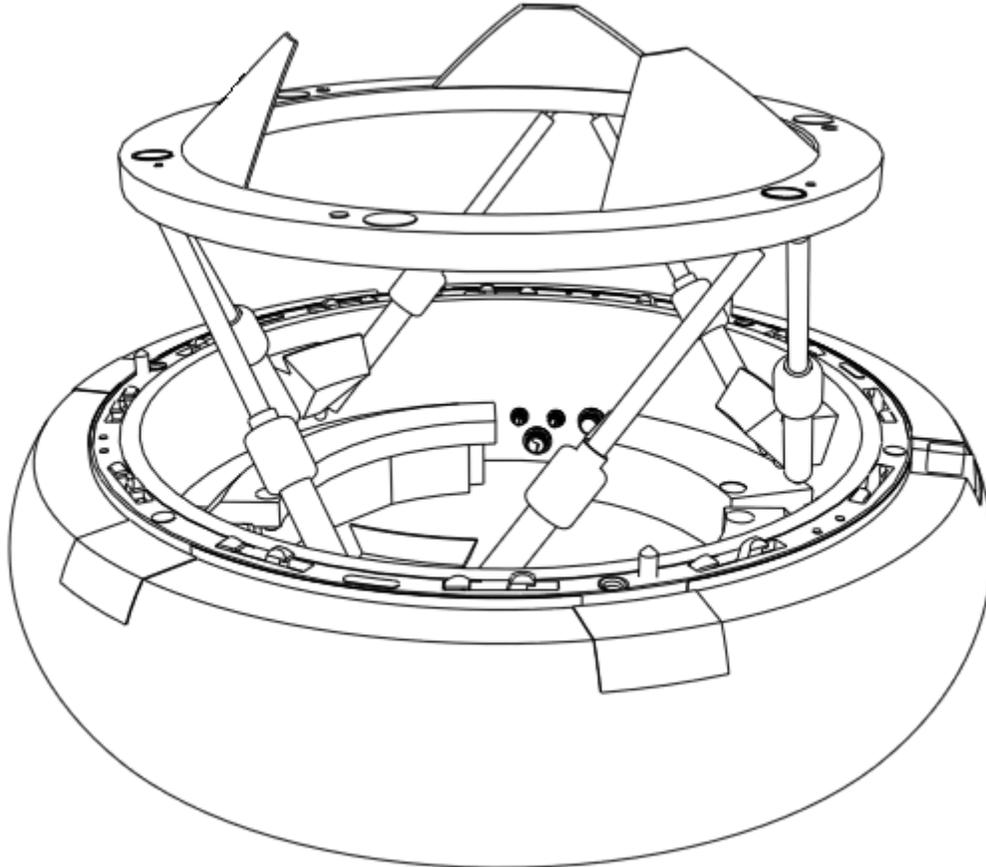


Figure 3.1-1 - iLIDS-301

3.1.2 iLIDS Interface Requirements

From a high-level system perspective, an iLIDS unit will have the following interfaces:

- iLIDS-to-Host Vehicle.
- iLIDS (chaser vehicle)-to-iLIDS (mating vehicle).
- iLIDS-to-Ground Support Equipment (GSE).

The iLIDS functions crossing each interface are shown in Figure 3.1-2 - iLIDS System Interface Diagram.

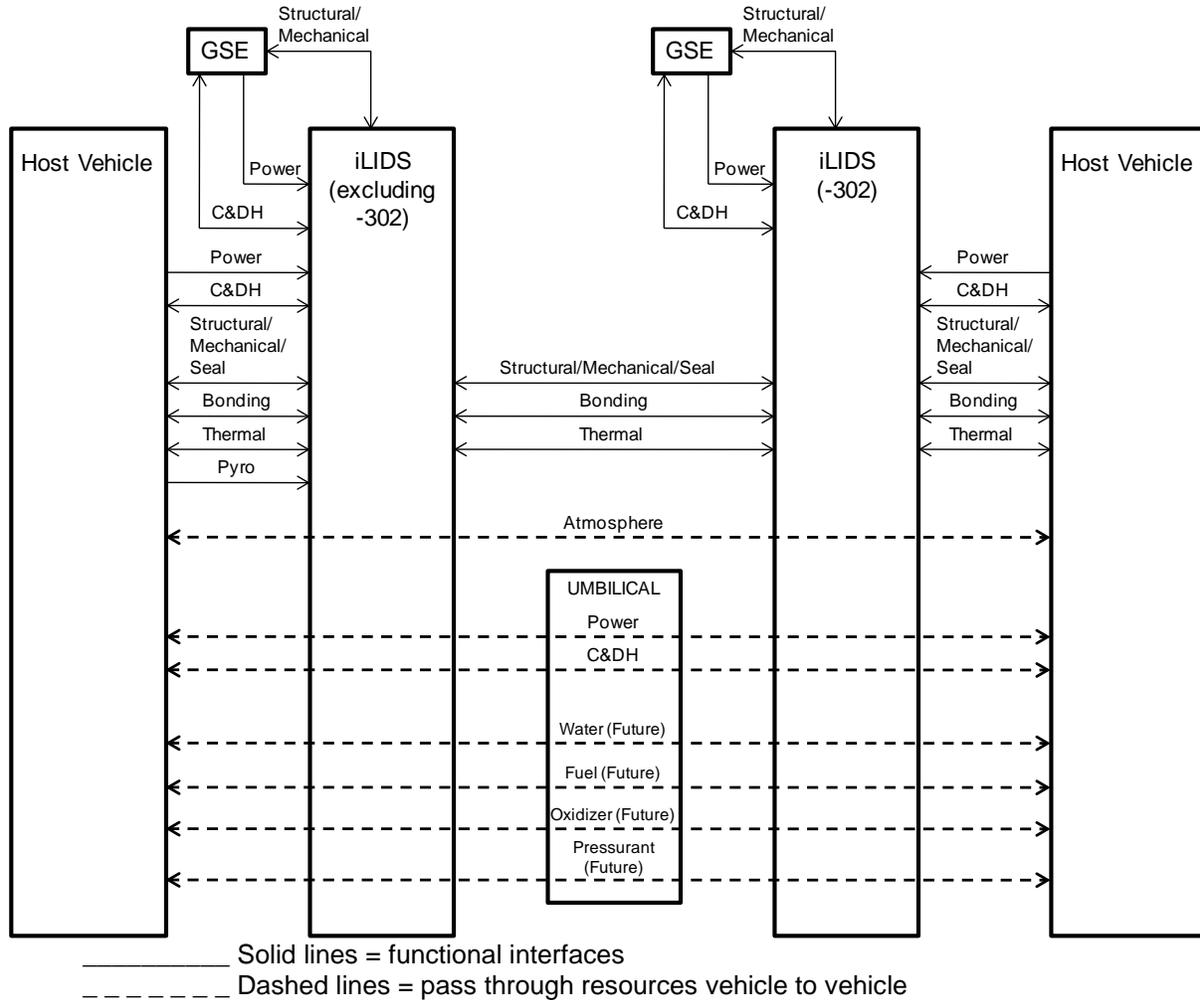


Figure 3.1-2 - iLIDS System Interface Diagram

[R.LIDS.1001] Berthing

The iLIDS shall support berthing per To Be Specified (TBS)-217.

Rationale: The iLIDS provides for vehicle-level docking. The iLIDS design shall not preclude berthing. Refer to Berthing Requirements Document TBS-217 for specific berthing requirements.


3.1.2.1 iLIDS-to-Host Vehicle Interface

The iLIDS incorporates the following interface functions to the Host Vehicle:

- iLIDS supports structural/mechanical attachment to the Host Vehicle.
- iLIDS receives power from the Host Vehicle.
- iLIDS supports vehicle-to-vehicle transfer of atmosphere, power, data, and communications. Future configurations will include water, fuel, oxidizer, and pressurant.
- iLIDS supports electrical bonding to the Host Vehicle.

- iLIDS supplies data to the Host Vehicle.
- iLIDS receives commands from the Host Vehicle.
- iLIDS (excluding -302) receives pyrotechnic controller signals from the Host Vehicle.

The iLIDS-to-Host Vehicle interface functions are shown in Figure 3.1-3 - iLIDS-to-Host Vehicle Interface Diagram.

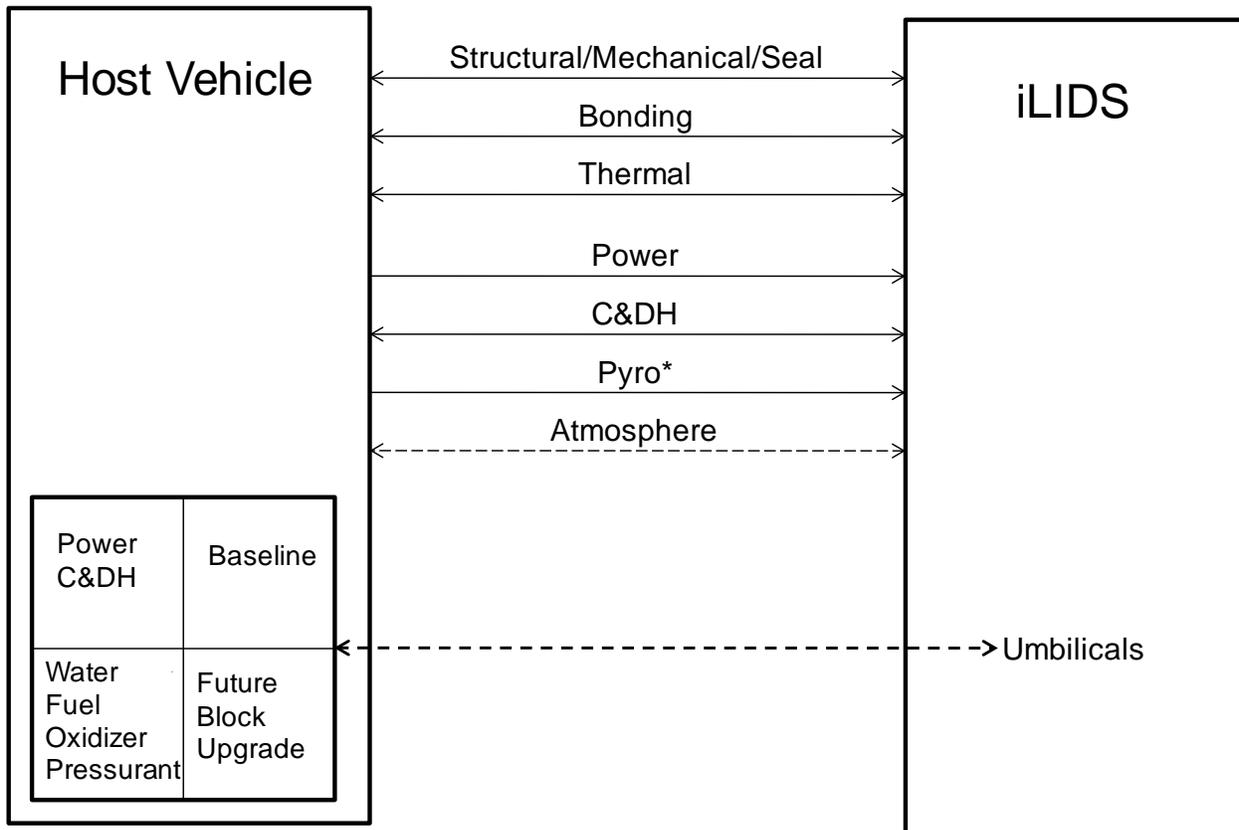

Note: * denotes Pyro is not an interface on iLIDS-302

_____ Solid lines = functional interfaces

----- Dashed lines = pass through resources vehicle to vehicle

Figure 3.1-3 - iLIDS-to-Host Vehicle Interface Diagram

[R.LIDS.0001] iLIDS Structural Attachment on Host Vehicle

The iLIDS shall provide structural mating and sealing to the host vehicle per JSC-65795, NDS IDD, figure NDS-to-Host Vehicle Mounting Interface.

Rationale: The host vehicle will provide accommodation to allow iLIDS to attach to the host vehicle. The iLIDS-to-host vehicle is secured/attached by fasteners. The iLIDS will provide the fasteners for this interface. The iLIDS mechanism will be provided as Government Furnished Equipment. Refer to JSC-65795, NDS IDD, for the details of this interface and a schematic of the mounting interface. The interface defined is based on the common interface used for Apollo/Soyuz, Shuttle/Mir, and Shuttle/ISS docking systems.

[R.LIDS.0003] Host Vehicle Electrical Power Interface

The iLIDS shall operate with host vehicle power of 120 Vdc or 28 Vdc in accordance with JSC-64599, iLIDS Electric Power Quality Description Document, as specified in Table 3.1-1.

Table 3.1-1 - Host Vehicle Electrical Power Interface

iLIDS Configuration	Electrical Power Interface
-301	120 Vdc
-302	120 Vdc
-305	28 Vdc

Rationale: An electrical power interface is needed to allow the host vehicle to power the iLIDS. This is the power for iLIDS consumption, which is not to be confused with the host vehicle pass-through power to the mating vehicle. iLIDS supports host vehicle power of either 120 Vdc or 28 Vdc in configurations as specified in JSC-64599, iLIDS Electric Power Quality Description Document.

[R.LIDS.0004] Reception of Commands for Docking

The iLIDS shall receive commands from the host vehicle for all sequences as specified in JSC-65795, NDS IDD, Appendix C.

Rationale: The host vehicle can send an individual sequence or chain of sequences. JSC-65795 will specify the ordering of sequence; however, it is up to the host vehicle's discretion to send the commands.

[R.LIDS.0006] Docking Termination

The iLIDS shall terminate docking upon receipt of a command from the host vehicle prior to hook activation.

Rationale: For safety purposes, automated functions such as docking should be designed with an override capability that allows the host vehicle to stop, safe, or assume manual control of the automated function after it was initiated. The point at which the override occurs will differ depending on the function. Some activities may only be taken to a safe state and no manual control is available. The intent is to cover the time span beginning with SCS mechanism release contact and extending through rigidization docking completion. This ability is required for the Vehicle crew, ISS crew, or other Space System operators to control automated functions onboard the Vehicle. It covers the case where the vehicle is unable to achieve capture, wants to back out, reset, and make a second docking attempt. It also covers the case where the crew simply becomes uncomfortable with the safety of proceeding onward with the docking operation, and wishes to halt it and back away.

[R.LIDS.0008] Pause Docking Commands

The iLIDS shall accept a command from the host vehicle to pause the docking sequence at predetermined safe points in the sequence.

Rationale: There are failure scenarios where the docking sequence should not be terminated, but rather paused to allow troubleshooting.

[R.LIDS.0009] Pause Undocking Commands

The iLIDS shall accept a command from the host vehicle to pause the undocking sequence at predetermined safe points in the sequence.

Rationale: There are failure scenarios where the undocking sequence should not be terminated, but rather paused to allow troubleshooting.

[R.LIDS.0010] Validation of Commands

The iLIDS shall validate commands from the host vehicle.

Rationale: The iLIDS will execute commands generated internally or from other systems in order to perform the specified function or operation. This process includes checking if the command has valid data values and if those can be executed, based on the current state or mode. Updates to the corresponding health and status parameters provide the results of the command execution.

[R.LIDS.0011] Command Notification

The iLIDS shall provide a notification for validity of commands to the host vehicle.

Rationale: Command notification includes a response for both valid and invalid commands. Command originators need a response or acknowledgement to understand the status of a command. Vehicle command validation failures, particularly crew initiated commands, warrant near real-time indication of validation failure to the crew, ground, and/or command initiator.

[R.LIDS.0012] Command Processing Latency

The iLIDS shall have a command processing latency no greater than 80 ms, where the performance measurement is taken from the time the command crosses the host vehicle to iLIDS interface to the time the command is acknowledged across the iLIDS to host interface, by the iLIDS avionics.

Rationale: An upper bound on command processing latency must be established to drive and manage overall avionics and software system design and end-to-end avionics and software performance. This value is driven by and is the part of the time allocation, allocated to iLIDS, from the max total time (580 ms from JSC-65795, NDS IDD) required for a switch from system A to B to take place in the case of a fault requiring primary control being transferred from system A to B. This value is necessary for the host vehicle to control total execution latency and assures that the commands will be received, interpreted and acknowledged in the required period. The 80 ms allocated to the iLIDS is distributed between the Control System Software (35 ms for receipt and 35 ms for return) and the avionics hardware (5 ms

for receipt and memory write and 5 ms for read and return). See also R.LIDS.1116 and R.LIDS.1137.

[R.LIDS.1116] H&S Data Processing Latency

The iLIDS shall have a Health and Status (H&S) data processing latency no greater than 45 ms, where the performance measurement is taken from the time Health and Status (H&S) data is sampled to the time conditioned H&S data crosses the iLIDS to host vehicle interface.

Rationale: An upper bound on H&S data processing latency must be established to drive and manage overall avionics and software system design and end-to-end avionics and software performance. This value is driven by and is the part of the time allocation, allocated to iLIDS, from the max total time (580 ms from JSC-65795, NDS IDD) required for a switch from system A to B to take place in the case of a fault requiring primary control being transferred from system A to B. If a fault requiring a switch to the redundant string is identified, there is a minimum amount of time to detect, report to the vehicle, and the vehicle to issue a command to switch between controllers in order to maintain safe control of the linear actuators, depending on the mode and state of iLIDS. This switch time is most critical during dock mode capture and attenuation states. See also R.LIDS.0012 and R.LIDS.1137.

[R.LIDS.1137] Fault Response Performance

The iLIDS shall be capable of detecting any internal fault, notifying the host vehicle of the fault via the H&S data, and executing a fault response command from the host vehicle within 580 ms, including 500 ms of communication and processing time within the host vehicle.

Rationale: The iLIDS must be capable of detecting and responding to faults quickly during docking attempts to ensure adequate dynamic performance in the event that system B is needed to complete a docking attempt or in the event a docking attempt abort is needed. iLIDS dynamics simulations will use this 580 ms time as the idle time between system A and system B operations and between system B operations and the beginning of a docking attempt abort. The requirement is based on the two associative requirements (R.LIDS.0012 and R.LIDS.1116). The iLIDS will send signals in 40 ms and receive in 40 ms.

[R.LIDS.0014] iLIDS Health and Status During iLIDS Operations

The iLIDS shall generate and provide health and status information to the host vehicle during iLIDS operations as specified in JSC-65795, NDS IDD, Appendix C.

Rationale: This includes generic health and status data as well as data from safety and mission critical functions. This requirement meets the intent of SSP 50021, Safety Requirements Document, Section 3.3.6.1.5.2 and SSP 41000, System Specification for the International Space Station, section 3.3.6.4.

[R.LIDS.0017] Communications with the Host Vehicle (EIA-422-B)

The iLIDS shall communicate with the host vehicle per the electrical characteristics specified in ANSI/TIA/EIA-422-B.

Rationale: This standard provides reliable serial communications. The iLIDS has requirements to be able to communicate in either EIA-422-B or MIL-STD-1553B, but not both, to a single host vehicle. The host vehicle supplied interfacing connector to iLIDS can only be wired for one of the two communication protocol types.

[R.LIDS.0019] Execution of Commands

The iLIDS shall execute valid commands received from the host vehicle.

Rationale: The iLIDS will execute commands generated from the host vehicle in order to perform the specified function or operation.

[R.LIDS.0020] Status of Execution of Commands

The iLIDS shall provide execution status of commands to the host vehicle.

Rationale: Command initiators should know the status of host vehicle commands to the iLIDS for monitoring and awareness of the iLIDS state.

[R.LIDS.0024] Transfer of Data and Communications

The iLIDS to Vehicle umbilical interfaces shall be capable of transferring hard-line MIL-STD-1553 and 10/100 Base T Ethernet data and communications between the mated vehicles.

Rationale: Hard line communication allows command and data handling between the mated vehicles. The formats provided are based on current ISS capability.

[R.LIDS.0024.1] Ethernet Cable Specification

The iLIDS umbilical cabling for 100 BASE-TX network segments shall be constructed using shielded twisted pair Category 5e components in accordance with ANSI/TIA/EIA 568B.2, Commercial Building Telecommunications Cabling Standard, Part 2: Balanced Twisted-Pair Cabling Components, with a maximum physical cable length not to exceed 4 feet.

Rationale: Ethernet cable for flight hardware is to be constructed using approved standards.

[R.LIDS.0024.2] MIL-STD-1553 Cable Specification

The iLIDS umbilical cabling for MIL-STD-1553 communication shall be constructed in accordance with SSQ 21655, Cable, Electrical, MIL-STD-1553 Databus, Space Quality, General Specification, with a maximum physical cable length not to exceed 4 feet.

Rationale: MIL-STD-1553 cable for flight hardware is to be constructed using approved standards.

[R.LIDS.0026] Bonding

The iLIDS to host vehicle interface shall meet Class R bonding requirements in accordance with NASA-STD-4003, Electrical Bonding for NASA Launch Vehicles, Spacecraft, Payloads, and Flight Equipment.

Rationale: Adherence to approved standards.

[R.LIDS.0091] Automatic Safing with Manual Override for Temperature Control

iLIDS heaters shall allow for individual zones to be commanded on and off by the host vehicle in order for the host vehicle to provide manual override for temperature control.

Rationale: This requirement supports the host vehicle capability to comply with JPR 8080.5 standard G-16

[R.LIDS.0041] Leak Rates for iLIDS Feed-Throughs When Mated (Excluding -302)

The iLIDS (excluding -302) feed-throughs internal to iLIDS shall have a maximum of 0.0007 lbm dry air/day (0.0003 kg air/day) leakage at vestibule pressurization of 14.7 psia (101 kPa) and an external vacuum pressure when mated.

Rationale: The leakage value is based on 14 Class 77H hermetic feed-throughs (4X size 25 connectors, 10X size 13 connectors). See also R.LIDS.1113 and R.LIDS.1114.

[R.LIDS.1113] Leak Rate for iLIDS-to-iLIDS Interface

The iLIDS-to-iLIDS interface shall have a maximum of 0.0025 lbm dry air/day (0.0011 kg air/day) leakage at vestibule pressurization of 14.7 psia (101 kPa) and an external vacuum pressure when mated.

Rationale: The leakage value assumes 12 HCS hooks fully engaged and derives from a nominal ISS trajectory and exposure to 1E21 atoms/cm² atomic oxygen and 214 equivalent sun hours (To Be Resolved (TBR)-212) ultraviolet radiation (for a duration of up to 21 days). The atomic oxygen exposure includes both pre-treatment of the seals and on-orbit exposure at 4.4E19 oxygen atoms/cm² per day. See also R.LIDS.0041 and R.LIDS.1114.

[R.LIDS.1114] Leak Rate for iLIDS-to-Vehicle Interface

The iLIDS-to-vehicle interface shall have a maximum of 0.0008 lbm dry air/day (0.0004 kg air/day) leakage at vestibule pressurization of 14.7 psia (101 kPa) and an external vacuum pressure when mated.

Rationale: The leakage value is based on room temperature static leakage testing with allowances for expected thermal excursions. See also R.LIDS.0041 and R.LIDS.1113.

[R.LIDS.1129] Communications with the Host Vehicle (MIL-STD-1553B)

The iLIDS shall communicate with the host vehicle per the electrical characteristics specified in MIL-STD-1553B.

Rationale: This standard provides reliable serial communications. The iLIDS has requirements to be able to communicate in either EIA-422-B or MIL-STD-1553B but not both to a single host vehicle. The host vehicle supplied interfacing connector to iLIDS can only be wired for one of the two communication protocol types.

[R.LIDS.1130] Message Formats with the Host Vehicle (MIL-STD-1553B)

The iLIDS shall use message formats specified in JSC-65795, NDS IDD for the MIL-STD-1553 communication interface.

Rationale: This document provides the data format and timing required to communicate over the MIL-STD-1553 data bus.

[R.LIDS.1131] Distinguishing Communications with the Host Vehicle (EIA-422-B vs. MIL-STD-1553B)

The iLIDS shall determine the host vehicle communication protocol (EIA-422-B or MIL-STD-1553B) by checking for shorted pins on the host vehicle connector.

Rationale: The iLIDS has requirements to be able to communicate in either EIA-422-B or MIL-STD-1553B but not both to a single host vehicle. The host vehicle supplied interfacing connector to iLIDS can only be wired for one of the two communication protocol types. The iLIDS must determine the host vehicle communication type in order to communicate with the vehicle.

[R.LIDS.1132] Duplex Communications with the Host Vehicle (EIA-422-B)

The iLIDS shall communicate with the host vehicle in full duplex, using differential signaling with two unidirectional, nonreversible point to point terminated transmission lines.

Rationale: This is the iLIDS specific implementation of EIA-422-B.

[R.LIDS.1133] Data Exchange with the Host Vehicle (EIA-422-B)

The iLIDS shall exchange data with the host vehicle in an asynchronous serial communications format utilizing a Universal Asynchronous Receiver/Transmitter (UART) controller, Non-Return to Zero (NRZ) with one start bit, 8 data bits (Least Significant Bit (LSB) first) and one stop bit.

Rationale: This is the iLIDS specific implementation of EIA-422-B.

[R.LIDS.1134] Message Exchange with the Host Vehicle (EIA-422-B)

The iLIDS shall exchange messages with the host vehicle of a fixed packet length, with a bit rate of 921.6 kilobaud, and a status update rate of 50 Hz.

Rationale: This is the iLIDS specific implementation of EIA-422-B.

[R.LIDS.5022] FRAM-Type Connector Pinouts

The iLIDS Flight Releasable Attachment Mechanism (FRAM)-Type Connectors shall utilize the pinouts as defined in JSC-65795, NDS IDD, table FRAM-Type Connector Pinouts.

Rationale: Each connector is a SSQ22680 FRAM-type connector that contains both power and data in the same connector shell. Separate power and data cable bundles are routed to the connector then combined in the connector backshell. Maximum possible separation is maintained inside the connector.

[R.LIDS.5034] Heater Power and Control

The iLIDS shall provide redundant heater control for two channels.

Rationale: Only one channel is actively controlling a heater zone at a time while the other channel is powered and processing data (e.g., checking Resistance Temperature Detectors (RTDs), sending H&S, etc.) ready to actively control the heater zone if the other channel fails. Refer to JSC-64599, Electric Power Quality Description Document for heater power timelines.

3.1.2.2 iLIDS-to-iLIDS Interface

The iLIDS integrated on the Vehicle incorporates the following interfaces when mated to another iLIDS:

- Support structural/mechanical attachment.
- Supports vehicle-to-vehicle transfer of atmosphere, power, data, and communications. Future configurations will include water, fuel, oxidizer, and pressurant.
- Support soft-capture through electromagnets.

The iLIDS-to-iLIDS system interface is illustrated in Figure 3.1-2 - iLIDS System Interface Diagram.

[R.LIDS.1142] IDSS IDD Compatibility

The iLIDS shall be compatible with the IDSS IDD Rev A.

Rationale: The IDSS IDD establishes standards for compatibility across all docking system designs such that they are capable of interfacing and safely docking with one another. The iLIDS design is based on docking interface features and loads specified in the NDS IDD that are also compatible with those specified in the IDSS IDD.

[R.LIDS.0029] Structural/Mechanical Attachment

The iLIDS shall provide an interface with 24 attachment points per JSC-65795, NDS IDD, figure HCS Hook Configurations and figure HCS Docking Interface where 12 active hooks on one system are nominally closed to engage 12 passive hooks on the mating system.

Rationale: The 24 points allows for nominal 12 hook pressurized/mated load carrying capability or enhanced 24 hook load capability. Alternatively, the passive hooks allow for a mated vehicle with active hooks to provide redundancy for hard mate in the event of a failure to hook.

[R.LIDS.0030] Transfer of Power

The iLIDS umbilical interfaces shall provide five 8 American Wire Gauge (AWG) conductors for electrical power transfer per umbilical with a maximum physical cable length of 4 feet.

Rationale: The intent of this requirement is to allow for power transference between two mated systems. This is not the power for the iLIDS consumption. The five lines give the host options to transfer redundant feeds of two different voltages. ISS will be capable of transferring both 120 Vdc and 28 Vdc. However, ISS is not expected to transfer both at the same time.

[R.LIDS.0034] Automatic Umbilical Demating

The iLIDS-to-iLIDS umbilical interface shall automatically demate during undocking operations.

Rationale: The umbilicals for power, data, etc. are intended to demate without crew intervention during the undocking sequence. This facilitates emergency undocking scenarios.

[R.LIDS.0037] Soft Capture

The iLIDS SCS-to-iLIDS SCS shall meet Class S bonding requirements in accordance with NASA-STD-4003, Electrical Bonding for NASA Launch Vehicles, Spacecraft, Payloads, and Flight Equipment.

Rationale: The SCS adheres to approved standards to provide a controlled resistance path to mitigate hazards caused by potential differences in electrical potential between mating vehicles during contact.

[R.LIDS.0038] Hard Capture

The iLIDS HCS-to-iLIDS HCS shall meet Class R bonding requirements in accordance with NASA-STD-4003, Electrical Bonding for NASA Launch Vehicles, Spacecraft, Payloads, and Flight Equipment.

Rationale: (1) to prevent possible circulating currents in interconnected electrical power systems; (2) to mitigate ground-conducted noise that could significantly degrade signal noise margins of intravehicular communications systems; and (3) to ensure a common voltage reference for intervehicular avionics systems connections. This does not apply to umbilicals.

[R.LIDS.1004] Hook Compliance

The iLIDS shall implement compliance on the passive hook of the mating active-passive hook pair.

Rationale: To successfully structurally mate with another docking system, it is necessary to specify where the compliance is located in the active/passive hook pairing.

[R.LIDS.1005] HCS Guide Pins

The iLIDS shall provide guide pins for tangential constraint and alignment of the systems during hard mate per JSC-65795, NDS IDD, figure HCS Guide Pin Detail and figure HCS Docking Interface.

Rationale: Guide pin/receptacles provide fine alignment during soft capture system retraction and restrict rotation and shear of the systems while mated. See also R.LIDS.0029 for the figure depicting guide pin location.

[R.LIDS.1005.1] HCS Guide Pin Receptacles

The iLIDS shall provide guide pin receptacles for tangential constraint and alignment of the systems during hard mate per JSC-65795, NDS IDD, figure HCS Guide Pin Hole Detail and figure HCS Docking Interface.

Rationale: Guide pin/receptacles provide fine alignment during SCS retraction and restrict rotation and shear of the systems while mated. See also R.LIDS.0029 for the figure depicting guide pin receptacle location.

[R.LIDS.1006] Seal on Seal Mating Interface (Excluding -302)

The iLIDS (excluding -302) HCS seal on seal mating plane shall meet the details as specified in JSC-65795, NDS IDD, figure NDS (excluding -302) HCS Mating Plane Seal and Electrical Bonding Details.

Rationale: The docking system must include a seal interface to support pressurization after structural mate. The seals meet the emerging IDSS and support either seal on seal or seal on metal operation. The corresponding figure in JSC-65795, NDS IDD, provides interface definition for the HCS Mating Plane.

[R.LIDS.1007] Seal on Metal Mating Interface (-302)

The iLIDS (-302) HCS seal on metal mating plane shall meet the details as specified in JSC-65795, NDS IDD, figure NDS (-302) HCS Mating Plane Seal and Electrical Bonding Details.

Rationale: Although the iLIDS is designed for seal on seal mated operations, the iLIDS for ISS will have a metallic sealing surface which will be more durable for the longer life of the ISS hardware. The corresponding figure in JSC-65795, NDS IDD, provides interface definition for the HCS Mating Plane.

[R.LIDS.1037] Umbilical Connector Mate Indication

The iLIDS shall provide loop back circuits for the host to verify connector mating on power and data umbilical connectors.

Rationale: This allows confirmation prior to power and data transfer that mating is successful.

[R.LIDS.1094] iLIDS Automatic/Manual Sequencing

The iLIDS shall provide the capability to operate sequences either automatically or manually via software control.

Rationale: Such operation allows the user to initiate sequences automatically or to manually step through the sequences. The iLIDS default is automatic sequencing.

[R.LIDS.1095] iLIDS Active Dock Mode

The iLIDS shall provide an Active Dock mode of operations.

Rationale: The Active Docking mode includes the entire docking sequence and all related flags as well as health and status data.

[R.LIDS.1096] iLIDS Active Undock Mode

The iLIDS shall provide an Active Undock mode of operations.

Rationale: The Active Undocking mode includes the entire undocking sequence and all related flags as well as health and status data.

[R.LIDS.1097] iLIDS Passive Dock Mode

The iLIDS shall provide a Passive Dock mode of operations.

Rationale: During the Passive Dock mode, the iLIDS will provide all H&S data as well as flags for soft capture. In addition, all outputs will be inhibited during operation (e.g., motors, magnets, etc.).

[R.LIDS.1098] iLIDS Passive Undock Mode

The iLIDS shall provide a Passive Undock mode of operations which inhibits all outputs, while providing H&S data and flags.

Rationale: During the Passive Undock mode, the iLIDS will provide all H&S data as well as flags for undocking completion. In addition, all outputs will be inhibited during operation (e.g., motors, magnets, etc.).

[R.LIDS.1099] iLIDS Safe Mode

The iLIDS shall provide a Safe mode of operations which inhibits all outputs, while providing H&S data.

Rationale: During the Safe mode, the iLIDS will provide all H&S data. In addition, all outputs will be inhibited during operation (e.g., motors, magnets, etc.).

[R.LIDS.1100] iLIDS Check-out Mode

The iLIDS shall provide a Check-out mode of operations to exercise the iLIDS mechanism through a pre-determined sequence.

Rationale: The Check-out mode detects damage and errors in iLIDS by exercising the iLIDS mechanisms through a pre-determined sequence.

[R.LIDS.1101] iLIDS Engineering Mode

The iLIDS shall provide an Engineering mode of operations to support troubleshooting without the constraints of other modes.

Rationale: The Engineering mode supports troubleshooting without the constraints of all other modes. For example, the Engineering mode will allow the user to command a single motor on/off. It is critical to adhere to proper procedures during this mode.

[R.LIDS.1112] Umbilical Auto-Mate

The iLIDS shall automatically mate umbilical connectors within 15 minutes of achieving hard mate.

Rationale: Umbilical connector mate is critical function for resource transfer. It is necessary to perform this action without Extravehicular Activity/Intravehicular Activity (EVA/IVA).

[R.LIDS.1124] iLIDS Active Hook Profile

The iLIDS shall provide active hooks as defined in JSC-65795, NDS IDD, figure HCS Active Hook Detail.

Rationale: The iLIDS, when mated, has 24 attachment points where 12 active hooks on one system engage 12 passive hooks on the mating system to carry nominal loads. The hook profile allows mating with the emerging IDSS. Refer to corresponding requirement ID in JSC-65795, NDS IDD.

[R.LIDS.1125] iLIDS Passive Hook Profile

The iLIDS shall provide passive hooks as defined in JSC-65795, NDS IDD, figure HCS Passive Hook Detail (excluding -304).

Rationale: The iLIDS, when mated, has 24 attachment points where 12 active hooks on one system engage 12 passive hooks on the mating system to carry nominal loads. The hook profile allows mating with the emerging IDSS. Refer to corresponding requirement ID in JSC-65795, NDS IDD.

3.1.2.3 iLIDS-to-EVA Interface

The iLIDS-to-EVA interface only includes translation around the exterior of the iLIDS while docked. If EVA occurs while undocked, the docking surfaces (i.e. "face") of the iLIDS tunnel is an EVA Keep-out Zone (KOZ) in addition to the interior of the tunnel. Refer to JSC-65795, NDS IDD for EVA KOZ.

[R.LIDS.0046] EVA Sharp Edges

Any iLIDS hardware accessible to the EVA crew within 24 in. of an adjacent EVA worksite, excluding the defined iLIDS EVA Keep-out-zone, shall meet the edge, corner, and protrusion requirements in Table 3-1 and Table 3-2 of JSC-28918, EVA Design Requirements and Considerations.

Rationale: These edge, corner, and protrusion requirements were originally developed to prevent the cutting of the EMU glove. This requirement is in accordance with JSC-28918, EVA Design Requirements and Considerations, Section 3.11.

[R.LIDS.0047] EVA Thin Materials

The iLIDS materials less than 0.08 in. (2.032 mm) thick that are used in a location accessible to EVA, edge radii shall be greater than 0.003 in. (0.0762 mm), and exposed edges shall be uniformly spaced, not to exceed 0.5 in. (1.27 cm) gaps, flush at the exposed surface plane and shielded from direct EVA interaction.

Rationale: These edge and corner requirements were originally developed to prevent the cutting of the Extravehicular Mobility Unit (EMU) glove. This requirement is in accordance with JSC-28918, EVA Design Requirements and Considerations, Section 3.11.2 and modified to represent the correct conversion factor.

[R.LIDS.0050] Burrs

iLIDS exposed surfaces accessible to EVA crew shall be smooth and free of burrs.

Rationale: Burrs are potential sharp edges and, therefore, can possibly cause an EVA suit catastrophic leakage. This is in accordance with JSC-28918, EVA Design Requirements and Considerations, Section 3.15.

[R.LIDS.0051] Screws and Bolts

iLIDS hardware accessible to the EVA crew shall include protective features on screws or bolts in established worksites (planned and contingency) and translation routes to prevent snagging, and to protect against sharp edges and impact.

Rationale: Snagging of the EVA suit or umbilicals could cause a tear, resulting in suit catastrophic leakages. Additionally, sharp-edge cuts and impact punctures could cause suit catastrophic leakages. This requirement is in accordance with JSC-28918, EVA Design Requirements and Considerations, Section 3.13.

[R.LIDS.0052] Hardware Protrusion

The iLIDS hardware shall be free of hardware protruding into the translation corridor as shown in Figure 4-6 of JSC-28918, EVA Design Requirements and Considerations, except for translation aids.

Rationale: Protrusions into the translation path are potential snag points (suit and umbilical tear hazard) and EVA suit impact hazards (puncture hazard). The 109 cm (43 in.) diameter translation path is based upon the EMU, which is a Space Transportation System (STS)/ISS legacy and derives from JSC-28918, EVA Design

Requirements and Considerations, Paragraph 4.20.1.1. This requirement is in accordance with JSC-28918, EVA Design Requirements and Considerations, Section 3.17.

[R.LIDS.0054] Entrapment Hazard - Snagging

Any iLIDS hardware that is EVA-accessible shall preclude snagging an EVA crewmember, umbilical, or a limb/tether, such that an EVA crewmember cannot be freed from entrapment.

Rationale: Inability to free an entrapped EVA crewmember is a catastrophic hazard. This requirement is in accordance with JSC-28918, EVA Design Requirements and Considerations, Section 3.19.1.

[R.LIDS.0055] Pinch Points

The iLIDS shall ensure that hardware located within translation paths and established worksites (planned and contingency) that is EVA-accessible does not have pinch hazards.

Rationale: This applies to, but is not limited to, hardware that pivots, retracts, flexes, or has a configuration such that a gap of greater than 0.5 in. (12.7 mm), but less than 1.4 in. (3.556 cm) (glove pinching), exists between the equipment and adjacent structure. Any item that has a potential to pinch any appendage, including legs or other body parts, will also be designed out or protected against, either by using a KOZ for areas outside a translation path or worksite or by using a physical barrier. This requirement is in accordance with JSC-28918, EVA Design Requirements and Considerations, Section 3.18.

[R.LIDS.0056] Entrapment Hazard - Trapping

iLIDS hardware that is EVA-accessible shall preclude trapping an EVA crewmember, umbilical, or a limb/tether, such that the EVA crew could not be freed.

Rationale: Inability to free an entrapped EVA crewmember is a catastrophic hazard. This requirement is in accordance with JSC-28918, EVA Design Requirements and Considerations, Section 3.19.1.

[R.LIDS.0057] Exposed Circular Holes

Exposed circular holes on iLIDS accessible to EVA crew shall be less than 0.5 in. (1.27 cm) in diameter or greater than 1.4 in. (3.556 cm) in diameter to prevent entrapment of an EVA suit-gloved finger.

Rationale: Entrapment of the EVA crewmember or damage to the EVA suit, and possible suit leakage, while freeing the entrapped appendage is considered a catastrophic hazard. Holes that are irregularly shaped will be evaluated individually as a part of the safety process. This requirement is in accordance with JSC-28918, EVA Design Requirements and Considerations, Section 3.16.

[R.LIDS.0058] EVA Induced Loads

iLIDS hardware within the EVA translation corridor, as shown in Figure 4-6 of JSC-28918, or adjacent EVA worksite, as defined in Figure 4-15 of JSC-28918, shall meet the requirements for Inadvertent Kick Loads, as defined in JSC-28918, EVA Design Requirements and Considerations, Table 4.7, EVA-Induced Loads.

Rationale: EVA can induce significant loads into surrounding hardware and structure. These loads were compiled over several years of EVA with legacy EMU hardware. Meeting this requirement means that the hardware, when exposed to EVA crew-induced loads, shall not: a) create a hazardous condition; b) suffer loss of structural integrity; or c) suffer a loss of functionality. This requirement is in accordance with JSC-28918, EVA Design Requirements and Considerations, Section 4.9.

[R.LIDS.0060] Glove Palm External Touch-Temperature Compliance

The iLIDS hardware that interfaces with the EVA glove palm shall be in accordance with JSC-28918, EVA Design Requirements and Considerations, Section 4.4.4.

Rationale: The iLIDS will provide input into the integrated thermal analysis. These limits do not apply to the backside of the glove and the EMU Thermal Micrometeoroid Garment (TMG) orthofabric that have different standards set out in Section 4.4.5, see R.LIDS.1121.

[R.LIDS.1121] EMU TMG Orthofabric and Glove Back External Touch-Temperature Compliance

The iLIDS hardware that interfaces with the EMU TMG orthofabric, which includes the backside of the EMU glove, shall be in accordance with JSC-28918, EVA Design Requirements and Considerations, Section 4.4.5.

Rationale: The iLIDS will provide input into the integrated thermal analysis. These limits do not apply to the palm of the glove that has different standards set out in Section 4.4.4. See R.LIDS.0060.

[R.LIDS.0061] DC Magnetic Field

The iLIDS shall preclude emitting Direct Current (DC) magnetic fields in excess of 250 Gauss during EVA translation across the iLIDS.

Rationale: This requirement will preclude interference with the EVA suit electronics/electrical systems and EVA tool electrical assemblies. This requirement is in accordance with JSC-28918, EVA Design Requirements and Considerations, Section 3.5.3.

[R.LIDS.1119] iLIDS Hazardous Energy Provision

iLIDS shall design or use components that retain hazardous energy, either with design features that prevent releasing the stored energy in any manner that could pose a hazard to the EVA crewmember or with provisions to allow safing of the potential energy, including provisions to confirm that the safing was successful.

Rationale: This requirement is in accordance with JSC-28918, EVA Design Requirements and Considerations, Section 3.7.

3.2 Characteristics**3.2.1 Functional Performance****3.2.1.1 Docking****[R.LIDS.0063] Docking Envelope (Excluding -302)**

The iLIDS (excluding -302) shall be capable of docking when the vehicle misalignments and relative motions are within the parameters as specified by JSC-65795, NDS IDD, table NDS Initial Contact Conditions "Design To" Limits.

Rationale: Table NDS Initial Contact Conditions "Design To" Limits includes high-level information on capture envelope data.

[R.LIDS.0064] Initial Contact Signal

The iLIDS, when in Active mode, shall provide a signal indication of initial contact.

Rationale: This indication is required by the host vehicle to perform attitude and translational system moding during capture operations.

[R.LIDS.0065] Soft Capture (Excluding -302)

The iLIDS (excluding -302) shall perform soft capture during docking operations.

Rationale: Soft capture is the initial physical connection prior to final structural mating.

[R.LIDS.0066] Soft-Capture Signal Indication

The iLIDS shall provide a signal indication of soft capture during docking operations.

Rationale: This indication allows the host vehicle to initiate proper moding.

[R.LIDS.0069] Attenuation (Excluding -302)

The iLIDS (excluding -302) shall attenuate relative motion between the two mating vehicles, subject to the mass properties, load constraints, and contact conditions specified in JSC-65970, iLIDS Thermal and Induced Environments (iLIDS TIES), during docking operations.

Rationale: JSC-65970, iLIDS Thermal and Induced Environments (iLIDS TIES), includes load attenuations and mass properties, among other properties.

[R.LIDS.0071] Hard-Capture Signal Indication

The iLIDS shall provide a signal indication of hard capture during docking operations.

Rationale: Hard capture signal indication indicates structural mating.

[R.LIDS.0073] Docking Time During Free Drift

The iLIDS shall require no more than 20 minutes of free drift once docking has been initiated.

Rationale: When the host vehicle is in free drift, the time needs to be limited to 20 minutes to preclude vehicle problems, such as solar arrays pointing away from the sun. Free drift starts upon initial contact of the load cell and ends with latches engaging.

[R.LIDS.5007] iLIDS Mating Interface Allowable Thermal Differential

The iLIDS shall achieve hard capture and soft capture within the boundaries of the acceptable temperature regions as defined in JSC-65795, NDS IDD, figure NDS Mating Interface Allowable Thermal Differential for Hard and Soft Capture.

Rationale: Hard capture includes engaging hooks and seal interface. The allowable temperature differential between the sealing interfaces during docking hard capture is restricted. Soft capture includes engagement of the mating guide petals and actuation of soft capture sensors and load cells. The allowable temperature differential between the mating interfaces during docking soft capture is restricted. If the temperatures are not within the defined boundaries, a thermal hold prior to hard latching or soft capture is required until the temperature requirements are satisfied.

[R.LIDS.5061] Maximum Temperature Differential for SCS Mating Interfaces

The iLIDS-SCS to iLIDS-SCS shall have a maximum allowable temperature differential of 100 °F (56 °C) for soft capture.

Rationale: This restriction is based on thermal expansion limits for the engagement of the mating guide petals in the mating iLIDS.

[R.LIDS.5008] iLIDS Capture Ring in Passive Mode

The iLIDS, when in Passive mode, shall have the soft capture ring configured in accordance with JSC-65795, NDS IDD, figure NDS Capture Ring in Passive Mode.

Rationale: The iLIDS performs soft capture using electromagnets and magnetic striker plates. The Passive mode iLIDS will also be scarred for future implementation of an SCS mechanical latch striker interface, which would allow an iLIDS-compatible docking system, using passive SCS mechanical latch striker, to capture. Soft capture is not structural mating, but the first level of attachment in the docking sequence.

[R.LIDS.5009] iLIDS Capture Ring in Active Mode

The iLIDS, when in Active mode, shall have the soft capture ring configured in accordance with JSC-65795, NDS IDD, figure NDS Capture Ring in Active Mode.

Rationale: The iLIDS performs soft capture using electromagnets and magnetic striker plates. The Passive mode iLIDS will also be scarred for future implementation of an SCS mechanical latch striker interface, which would allow an iLIDS-compatible docking system, using passive SCS mechanical latch striker, to capture. Soft capture is not structural mating, but the first level of attachment in the docking sequence.

[R.LIDS.5010] SCS Guide Petal System

The iLIDS guide petals shall be configured as detailed in JSC-65795, NDS IDD, figure SCS Guide Petal System.

Rationale: There are three guide petals that mount to the soft capture ring and face inward. The petals are equally spaced around the circumference of the soft capture docking ring.

[R.LIDS.5011] SCS Guide Petal System Detail

The iLIDS guide petals shall meet the features as detailed in JSC-65795, NDS IDD, figure SCS Guide Petal System Detail.

Rationale: There are three guide petals that mount to the soft capture ring and face inward. The petals are equally spaced around the circumference of the soft capture docking ring.

[R.LIDS.5012] SCS Ring Dimensions

The iLIDS SCS dimensions shall be in accordance with JSC-65795, NDS IDD, figure SCS Guide Petal System Profile.

Rationale: The iLIDS is NASA's implementation for the emerging IDSS using low impact docking technology. The figure also identifies mechanical latch striker mounting holes, which provide scarring for future implementation of a mechanical latch striker interface.

[R.LIDS.5013] SCS Magnet and Striker

The SCS shall employ three magnets and three striker plates distributed across the soft capture ring, as defined in JSC-65795, NDS IDD, figure SCS Magnetic Capture System, with a minimum striker plate rotational compliance of 2 degrees from the X-Y plane.

Rationale: The iLIDS performs soft capture using electromagnets and magnetic striker plates.

[R.LIDS.5014] Pre-Capture SCS Compressive Force Resistance

The iLIDS soft capture interface shall have no more than 6 lb compressive force resistance during capture.

Rationale: The low impact technology SCS requires minimal compressive force resistance across the interface prior to capture. To maximize the benefit of low impact technology, a maximum of 12 lb compressive force resistance is allowed across the interface. This means each side is allowed to have a maximum of 6 lb resistance. This resistance might include magnet strikers compliance mechanisms, SCS capture sensors, and any other sources of compressive force resistance.

[R.LIDS.5062] HCS Compressive Force Resistance During SCS Retraction

The iLIDS hard capture interface shall have no more than 18.9 lb compressive force resistance during SCS retraction.

3.2.1.2 Rationale: The holding force capability of the SCS decreases due to geometry as it is retracted and reaches a critical point at the HCS ready to hook indication height. A maximum of 37.8 lb compressive force resistance is allowed across the interface at this height. This means each side is allowed to have a maximum of 18.9 lb resistance. This resistance includes the contributions of HCS sensor mechanisms, such as ready to hook and undocking complete limit switch mechanisms, but does not include the effects of dynamic seal compression. The HCS drives dynamic seal compression so the SCS does not account for those effects. Undocking

[R.LIDS.0075] Undocking Time

The iLIDS shall be capable of undocking within 10 minutes when iLIDS undocking sequence is initiated.

Rationale: The requirement implies that all nominal systems are required to be operational within this time, including GN&C parameters. The undocking sequence begins with the hatch secured and the crew's initiation of the iLIDS undocking sequence.

[R.LIDS.0076] Indication of Physical Separation

The iLIDS shall provide a signal indication of physical separation during undocking operations.

Rationale: This indication is required by the host vehicle to perform attitude and translational system moding during undocking operations.

[R.LIDS.0079] Adjustability of iLIDS Performance Parameters

The iLIDS shall accept software reconfiguration, via commands, of soft capture system controller performance parameters to accommodate capture/attenuation of various mass vehicles within the load set defined in JSC-65970, iLIDS Thermal and Induced Environments (iLIDS TIES).

Rationale: This requirement will allow iLIDS reconfiguration (through software parameters or mode settings via i-Load). For example, iLIDS can be reconfigured to make the Six Degrees of Freedom (6-DOF) platform load reaction stiffer for a particular mission or docking scenario.

[R.LIDS.1042] Pyrotechnic Initiation (Excluding -302)

The iLIDS (excluding -302) shall use NASA Standard Initiators (NSIs) for pyrotechnic devices.

Rationale: Pyrotechnic provides additional fault tolerance for undocking hazards. iLIDS pyrotechnics are safety-critical because their inadvertent operation results in a catastrophic hazard. Use of proven NSI design ensures safe and reliable pyrotechnic design and operation. This requirement is in accordance with SSP 50021, Safety Requirements Document, Section 3.3.6.5.1.1. The -302 is intended for use on ISS and has been decided to not include pyros so that the port cannot be fouled by firing pyros and disabling hooks for future docking.

[R.LIDS.1069] Separation System - Demate

The iLIDS shall provide a separation system capable of providing demate work (energy) between 28.9 ft-lb (4.0 kgf-m) and 35.0 ft-lb (4.8 kgf-m) at zero interface separation.

Rationale: Docking systems historically have provided a means to accelerate the vehicle away when the structural mate mechanism is released. The system must be capable of demating connectors and overcoming seal stiction in addition to providing the demating energy. Zero interface separation corresponds to hooks fully closed and seals fully compressed. Refer to corresponding requirement ID in JSC-65795, NDS IDD.

[R.LIDS.1115] Pyrotechnic Release (Excluding -302)

The iLIDS (excluding -302) shall provide pyrotechnics in both the active and passive hooks at the hard mate interface capable of releasing a single gang of 6 hooks within 150 ms, allowing the host vehicle to separate from the mated vehicle.

Rationale: If the iLIDS active hooks fail to unlatch, the host vehicle may fire the pyrotechnic(s) to release the gang(s) of hooks containing the failed hooks allowing the host to separate from the mated vehicle. The iLIDS active and passive hooks are distributed across 4 gangs of 6 hooks each (2 active hook gangs and 2 passive hook gangs) for a total of 24 hooks (12 active and 12 passive).

[R.LIDS.5021] Umbilical Separation - Passive

The iLIDS umbilicals shall be designed to be separated passively by the energized separation system in the event of a failure to retract.

Rationale: The iLIDS umbilical connector interfaces transfer resources between the docked vehicles. On undocking, these connectors are nominally driven to the unmated state prior to unlatching the hooks. This requirement ensures the umbilical mechanism design accounts for the off-nominal case of passive umbilical separation. Passive separation requires only axial loads to disengage the umbilical connector.

[R.LIDS.1144] Undocking Pressure

The iLIDS shall be capable of undocking with residual pressure up to 0.5 psi within the docking vestibule.

Rationale: The two mated host vehicles together shall provide a minimum of two fault tolerance to an inability to depressurize the docking vestibule to a minimum of 0.5 psi for undocking. The iLIDS needs to ensure undocking capability at worst case residual pressures in the event host vehicles cannot fully depressurize the docking vestibule to vacuum.

3.2.2 Physical

[R.LIDS.0082] iLIDS Pass-Through Diameter, Petals Removed

With SCS guide petals removed, the iLIDS shall provide an unobstructed minimum diameter passage for pressurized transfer of crew and cargo with no permanent protrusions, drag-through cables, or obstruction, excluding the inter-module ventilation air duct as specified in JSC-65795, NDS IDD, figure NDS Docking Interface.

Rationale: Pressurized transfer of cargo and unsuited crew, etc. is the primary purpose of docking the Vehicle. SSP 50005, Section 8.8.3.1 requires a minimum pass-through diameter of 32 in. be available for translation paths.

[R.LIDS.0082.1] iLIDS Pass-Through Diameter, With Petals

With SCS guide petals installed, the iLIDS shall provide the unobstructed minimum diameter passage for pressurized transfer of crew and cargo with no permanent protrusions, drag-through cables, or obstruction, excluding the inter-module ventilation air duct as specified in JSC-65795, NDS IDD, figure NDS Docking Interface.

Rationale: With the petals installed it is still a requirement to provide a clear passage for unsuited crew, cargo, etc. Value is based on study by ISS for cargo transfer.

3.2.2.1 Mass

[R.LIDS.0080] iLIDS (-301) Mass

The iLIDS (-301) mass shall not exceed 750 lbm (340.91 kg).

Rationale: This is the mass with Mass Growth Allowance (MGA).

[R.LIDS.1056] iLIDS (-302) Mass

The iLIDS (-302) mass shall not exceed 704 lbm (320.0 kg).

Rationale: This allocation is based on the -301 with adjustments per the -302 configuration differences. The -302 mass does not include host-supplied components (e.g., MMOD shield, Thermal Protection System [TPS], etc.). The mass of these host-provided integration components is dependent on the host implementation. The -302 mass does include cabling and electrical box mass for the NDS-provided, host-mounted boxes.

3.2.2.2 Dimensions/Volume

Dimensions and volume are defined in JSC-65795, NDS IDD. iLIDS will meet all IDD definitions as defined by Table C-4 - iLIDS PTRS/IDD Associative Requirements.

[R.LIDS.5003] iLIDS Volume and Keep Out Zones

The iLIDS envelope shall be in accordance with JSC-65795, NDS IDD, figure NDS Cross Section.

Rationale: The figure defines the static and dynamic envelopes that the iLIDS must adhere to for host vehicle integrations and operations. The figure also establishes an EVA KOZ that is used for the exclusion of EVA requirements.

3.2.3 Environmental**[R.LIDS.0027] iLIDS Thermal and Induced Environments**

The iLIDS shall meet all of its functional and performance requirements during and after exposure to the loads defined in JSC-65970, iLIDS Thermal and Induced Environments (iLIDS TIES).

Rationale: The iLIDS will meet the loads defined in JSC-65970, iLIDS TIES. JSC-65970 contains loads for launch, in-flight, docking/berthing, structural limits, and postcapture, thermal, among others. JSC-65970 will specify which loads are functional during and/or after vs. survival only. The iLIDS will be capable of meeting launch loads with the active hooks in the open configuration, umbilicals and separators retracted, the soft capture system locked down, and with soft capture sensors, ready-to-hook sensors, and undocking complete limit switches not depressed.

[R.LIDS.0104] Environmental Qualification and Acceptance Testing

The iLIDS shall comply with SSP 41172, Qualification and Acceptance Environmental Test Requirements, for environmental certification testing.

Rationale: The SSP 41172 standard contains both qualification and acceptance testing requirements for natural and induced environments as well as minimum design screening requirements that are beyond the expected environments. As with other design and construction standards, SSP 41172 will drive the design because the design must take into account that it will need to encompass a larger range of environments or minimum screening environments,

whichever is greater, as part of the equipment's certification program. Vehicle spacecraft equipment is required to meet specific requirements through qualification testing to Maximum Predicted Environments (MPE) with sufficient margin, durations, and workmanship standards. Qualification testing demonstrates the design, manufacturing process, and acceptance program produce hardware/software that meet specification requirements with adequate tolerance.

3.2.3.1 Thermal

[R.LIDS.1051] Active Thermal System Control

The iLIDS shall provide heater control for the docking system, which has controllable set points from the host.

Rationale: Requiring the docking system to control its own heaters simplifies the electrical interface to the host. Control set points allow for different hosts to set minimum temperature to correspond to host dew point requirements. The docking system will define operational and survivability constraints. Based on these constraints, the docking system will implement blankets and/or heaters as required. This requirement also fulfills JPR 8080.5 G-16.

[R.LIDS.1141] Heater Operation - Blind Mode

The iLIDS shall perform default heater operation when communications to the iLIDS heater controller is not available.

Rationale: The blind mode heater operation is to maintain the iLIDS within the thermal survivability range when being stored or displaced. The iLIDS heater controller will have default values preprogrammed into the controller. If the controller starts up with no communications, it will use the internal default values for set points. If the controller is operating normally and then loses communications, the last heater set points received will be used until another communications message is received or the heater controller is power-cycled.

3.2.3.1.1 iLIDS-to-iLIDS Thermal Docking Interface

[R.LIDS.5050] iLIDS-to-iLIDS Thermal Contact Conductance

The iLIDS thermal contact conductance across the iLIDS-to-iLIDS docking interface shall be 15 Btu/hr-ft²-°F (85 W/m²-K) to 50 Btu/hr-ft²-°F (284 W/m²-K) for the metal-to-metal contact area.

Rationale: The iLIDS utilizes heaters to condition/maintain temperatures above the minimum limits for each operating mode.

3.2.3.1.2 iLIDS-to-Vehicle Thermal Docking Interface

[R.LIDS.5057] iLIDS-to-Host Vehicle Thermal Contact Conductance

The thermal contact conductance across the iLIDS-to-host vehicle interface shall be 15 Btu/hr-ft²-°F to 50 Btu/hr-ft²-°F for the metal-to-metal contact area

Rationale: The iLIDS utilizes heaters to condition/maintain temperatures above the minimum limits for each operating mode.

3.2.3.2 Pressure

[R.LIDS.0101] Differential Pressure Limits

The iLIDS shall function during and after exposure to the pressure differential of 15.95 psi (1100 hPa).

Rationale: The iLIDS must survive specified pressurized environments to ensure operations during design reference missions throughout its life. This is also in accordance with JPR 8080.5, Standard MS-1, "Equipment containers or enclosures for use within pressurized compartments of spacecraft shall be designed to withstand rapid decompression of the spacecraft without yielding, fracturing, or sustaining damage."

[R.LIDS.0103] iLIDS Depress Rate

The iLIDS shall survive a 0.76 psi/sec (5.24 kPa/sec) (TBR-220) depressurization rate over the range of 15.2 psia (104.8 kPa) to 5.5E-12 psia (2.7E-10 Torr) without loss of functionality as specified herein.

Rationale: The iLIDS must survive all specified natural and induced pressure to ensure operations during design reference missions throughout its life. This is also in accordance with JPR 8080.5, Standard MS-1. The 0.76 psi/sec is the same value in SSP 41004, Common Berthing Mechanism to Pressurized Elements Interface Control Document (ICD).

[R.LIDS.1118] iLIDS Repress Rate

The iLIDS shall survive a 0.30 psi/sec (2.07 kPa/sec) (TBR-220) repressurization rate over the range of 5.5E-12 psia (2.7E-10 Torr) to 15.2 psia (104.8 kPa) without loss of functionality as specified herein.

Rationale: The iLIDS must survive all specified natural and induced pressure to ensure operations during design reference missions throughout its life. This is also in accordance with JPR 8080.5, Standard MS-1. The 0.30 psi/sec is the same value in SSP 41004, Common Berthing Mechanism to Pressurized Elements Interface Control Document (ICD).

3.2.3.3 Vibration

The iLIDS acceleration requirements are decomposed in [R.LIDS.0027] by meeting all functional and performance requirements during and after exposure to the loads defined in JSC-65970, iLIDS Thermal and Induced Environments (iLIDS TIES).

3.2.3.4 Acceleration

The iLIDS acceleration requirements are decomposed in [R.LIDS.0027] by meeting all functional and performance requirements during and after exposure to the loads defined in JSC-65970, iLIDS Thermal and Induced Environments (iLIDS TIES).

3.2.3.5 Shock

The iLIDS acceleration requirements are decomposed in [R.LIDS.0027] by meeting all functional and performance requirements during and after exposure to the loads defined in JSC-65970, iLIDS Thermal and Induced Environments (iLIDS TIES).

3.2.3.6 Electromagnetic Interference/Electromagnetic Compatibility

[R.LIDS.0100] Electromagnetic Interference/Electromagnetic Compatibility

The iLIDS shall be designed to meet requirements in JSC-65842, iLIDS Electromagnetic Environmental Effects (E3) Description Document.

Rationale: This requirement adheres to approved standards.

3.2.3.7 Humidity

[R.LIDS.1077] Humidity Limits

The iLIDS shall meet specified performance following exposure 0 to 98 percent relative humidity during ground stowage and processing operations.

Rationale: Refer to the launch site values for humidity in NSTS 07700 Vol. X, Space Shuttle Flight and Ground System Specification Book 2, Environment Design, Weight, and Performance, and Avionics Events Table 11.10.9 and Figure 11.10-5.

3.2.3.8 Acoustic Emissions

[R.LIDS.1074] Acoustic Emission Limits

The iLIDS shall limit acoustic emissions to the limits as defined in SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T), Section 5.4.

Rationale: This is in accordance with approved standards. Acoustic limits are only applicable to a crewed vehicle condition with hatches closed. The iLIDS is not a source of acoustic noise when docked and unpowered.

3.2.3.9 Meteoroids and Orbital Debris

[R.LIDS.0295] iLIDS MMOD - Short Duration

The iLIDS (excluding -302) shall provide a Probability of No Penetration (PNP) of 0.999983 or greater during 210 days docked with the ISS when exposed to the MMOD environments as defined in NASA/TP-2002-210780 for orbital debris and SSP 30425, Space Station Program Natural Environment Definition for Design for meteoroids.

Rationale: The system will be exposed to a variety of natural and induced environments that may pose a threat to functionality and performance, and therefore must be taken into account in the design. The PNP is based on the exposed surface area of the iLIDS with 210 days of exposure while docked at the ISS. The surface area assumes standoff shielding on the iLIDS outer diameter. Penetration is defined as a through-hole in the pressure shell or detached spall from the inside surface of

the pressure shell such that hazardous debris is generated within the pressurized volume. This requirement does not account for failures resulting from MMOD strikes on other components or during unmated operations. These failure probabilities will be presented as technical risks and accounted for in hazard reports. The -302 has a longer life and therefore a different PNP number.

[R.LIDS.1111] iLIDS (-302) MMOD

The iLIDS (-302) shall provide a MMOD shield mounting interface as defined in JSC-65795, NDS IDD, figure NDS (-302) Host-Provided MMOD Interface.

Rationale: The system will be exposed to a variety of natural and induced environments that may pose a threat to functionality and performance, and therefore must be taken into account in the design. This requirement is for providing the interface only; the MMOD shield and PNP will be provided by the host vehicle.

3.2.3.10 Atomic Oxygen

[R.LIDS.1088] Atomic Oxygen

The iLIDS shall withstand the nominal ram Atomic Oxygen (AO) fluence of 5.0E21 oxygen atoms/cm² per year to exposed ram surfaces for missions.

Rationale: The AO environment is applicable to iLIDS internal surfaces and equipment exposed to the external AO environment in the absence of a docked vehicle. The maximum short-term: 4.4E19 oxygen atoms/cm² per day for 30 days or less. Values are derived from the natural environment definition given in SSP 30425, Space Station Program Natural Environment Definition for Design.

3.2.3.11 External Contamination

NASA Materials and Processes Division (ES4) material experts have reviewed the iLIDS and determined that the contamination requirements are not applicable to docking systems. Contamination requirements are intended for systems such as photovoltaic (PV) arrays, radiators, optical GN&C instruments, windows, etc.

3.2.3.12 Ionizing Radiation

[R.LIDS.0183] Ionizing Radiation

The iLIDS shall meet specified performance requirements when exposed to the radiation dose environment in accordance with JSC-64598, iLIDS Ionizing Radiation Control Plan.

Exception: The iLIDS (-301 & -302) shall meet radiation hardness levels for Single Event Upsets (SEUs), Single Event Latch-up (SEL), Single Event Gate Rupture (SEGR), and Single Event Burn-Out (SEB) to a minimum True Linear Energy Transfer (LET) = TBS-218.

Rationale: The iLIDS must meet ionizing radiation requirements. This document establishes the ionizing radiation design susceptibility environment for low earth orbit and lunar environments.

3.2.3.13 Lightning

[R.LIDS.5033] Command and Data Handling Interface, Physical Layer Safe Operation Area

The iLIDS TIA-422-B Command and Data Handling (C&DH) interface shall be protected against lightning transients to the limits as defined in JSC-65795, NDS IDD, figure Safe Operation Area for TIA-422-B C&DH Serial Port.

Rationale: The host vehicle protects the iLIDS from primary lightning effects (i.e., lightning direct current path) and limits secondary effects on the TIA-422-B C&DH interface to levels compliant with the Safe Operation Area curves documented in JSC-65795, NDS IDD. The curves were computed for the iLIDS TIA-422-B Transient Voltage Suppressor (TVS) using ARP5412, Double Exponential Current Waveform 1. Open circuit voltage and short circuit current refer to the circuit parameters at the iLIDS host connector.

3.2.3.14 Solar Ultraviolet Radiation

[R.LIDS.1138] Solar Ultraviolet Radiation (Excluding -302)

The iLIDS (excluding -302) shall meet all of its functional and performance requirements during and after exposure to the solar ultraviolet radiation (UV) environment as defined in SSP 30425, Space Station Program Natural Environment Definition for Design, Section 7.2 with the limit to not to exceed 214 Equivalent Sun Hours (ESH) (TBR-212) ultraviolet radiation (for a duration of up to 21 days).

Rationale: The iLIDS must operate in the solar ultraviolet radiation environment. The limits are based on restrictions for the iLIDS seal exposure to ESH and UV.

[R.LIDS.1139] Solar Ultraviolet Radiation (-302)

The iLIDS (-302) shall meet all of its functional and performance requirements during and after exposure to the solar ultraviolet radiation environment as defined in SSP 30425, Space Station Program Natural Environment Definition for Design, Section 7.2.

Rationale: The iLIDS must operate in the solar ultraviolet radiation environment.

3.2.3.15 Vacuum

[R.LIDS.1140] Vacuum Environment

The iLIDS shall be fully functional while exposed to the ambient pressure of 1.0E-11 Pascal.

Rationale: Value is derived from the natural environment definition given in SSP 30425, Space Station Program Natural Environment Definition for Design. This is the vacuum environment for geosynchronous environment.

3.2.4 Reliability

[R.LIDS.0113] Failure Modes and Effects Analysis/Critical Item List

A Failure Modes and Effects Analysis (FMEA) shall be performed on each level of the iLIDS assembly for each required environmental condition and for each operational and abort mode per SSP 30234, Instructions for Preparation of Failure Modes and Effects Analysis (FMEA) and Critical Items List (CIL) for Space Station.

Rationale: This requirement adheres to approved standards

3.2.4.1 Failure Tolerance

[R.LIDS.0106] Catastrophic Hazard Fault Tolerance

The iLIDS shall be designed such that no combination of two failures, or two operator errors, or one of each can result in a disabling or fatal personnel injury, or loss of the ISS, unless controlled by Design For Minimum Risk (DFMR). Compliance with this requirement may be accomplished at the iLIDS level or through a combination of hazard controls at the integrated Visiting Vehicle (VV) and/or ISS levels.

Rationale: Compliance with ISS program safety requirements. Verification of this requirement may be satisfied via a combination of hazard controls at the iLIDS level and at the integrated-system level (including both the VV and ISS). In areas where the iLIDS cannot meet this requirement alone, the required integrated hazard controls will be documented as an interface requirement in the appropriate ICD/IDD, and the hazard reports will reference those requirements as appropriate. Personnel considered include all flight and ground crews.

[R.LIDS.0107] Critical Hazard Fault Tolerance

The iLIDS shall be designed such that no single failure or single operator error can result in a non-disabling personnel injury, severe occupational illness; loss of a major ISS element on-orbit life sustaining function or emergency system, unless controlled by DFMR. Compliance with this requirement may be accomplished at the iLIDS level or through a combination of hazard controls at the integrated VV and/or ISS levels.

Rationale: Compliance with ISS program safety requirements. Verification of this requirement may be satisfied via a combination of hazard controls at the iLIDS level and at the integrated-system level (including both the VV and ISS). In areas where the iLIDS cannot meet this requirement alone, the required integrated hazard controls will be documented as an interface requirement in the appropriate ICD/IDD, and the hazard reports will reference those requirements as appropriate. Personnel considered include all flight and ground crews.

[R.LIDS.1107] Failure Tolerance

The iLIDS failure tolerances shall meet or exceed the allocations in the Failure Tolerance Allocation table for the identified functions.

Table 3.2-1 - Failure Tolerance Allocation

End Item Function	Failure Tolerance Allocation ^{(A) (B) (C) (E) (F) (G)}	
	iLIDS (-301)	iLIDS (-302)
Unlatch hard capture hooks	2	1
Achieve soft capture during docking	1	1
Achieve hard capture during docking	1	1
Hold cabin pressure while docked	1 ^(D, G)	1 ^(D,G)
Charge separator springs	1	1
Pass power and data between docked vehicles	1	1
Provide heater power	1	1
Provide temperature sensing	1	1
Provide MMOD protection	0	0

Notes:
 (A) Maintenance may not be considered as a redundant path to meet these requirements.
 (B) Redundancy used to achieve failure tolerance may be similar or dissimilar.
 (C) Failure tolerance defined by requirements in R.LIDS.0106 and R.LIDS.0107.
 (D) Degraded performance allowed after one hook failure.
 (E) When the iLIDS functions are implemented using structure, the structure shall be exempted from failure tolerance requirements.
 (F) When the iLIDS functions are implemented via mechanisms, the mechanisms will be designed for minimum risk and considered to be single failure tolerant equivalent.
 (G) One fault tolerance on iLIDS is implemented via dual seals.

Rationale: Fault tolerance improves safety and likelihood of mission success for missions involving iLIDS. The levels of fault tolerance established are reflective of the design that resulted from mass and risk trades performed in the development of iLIDS for the Constellation program, as subsequently further tailored for the ISS program.

3.2.4.2 Failure Propagation**[R.LIDS.0108] Failure Propagation**

A single failure of the iLIDS shall preclude propagation of additional failures external to the failed end item.

Rationale: This is a NASA standard reliability requirement.

3.2.4.3 Failure Detection, Isolation, and Recovery

[R.LIDS.0109] Failure Detection, Isolation, and Recovery

The iLIDS shall provide Fault Detection, Isolation, and Recovery (FDIR).

Rationale: NPR 8705.2, Human-Rating Requirements for Space Systems, mandates FDIR for faults of human-rated systems that affect critical functions. FDIR is required for crew safety and mission success because it enables the recovery of such critical functions. In addition, fault detection enables crew abort or flight termination (in case of nonrecoverable failures). Fault isolation further enables common-mode failure identification, in-flight maintenance, and fleet supportability.

3.2.5 Maintainability

Reserved

3.2.6 Transportability

3.2.6.1 Ground Transportability

The iLIDS ground transportability loads are decomposed in [R.LIDS.0027] by meeting all functional and performance requirements during and after exposure to the loads defined in JSC-65970, iLIDS Thermal and Induced Environments (iLIDS TIES).

3.2.7 JPR 8080.5 - JSC Design and Procedural Standards

[R.LIDS.1109] JPR 8080.5 - JSC Design and Procedural Standards

The iLIDS shall meet JPR 8080.5, JSC Design and Procedural Standards requirements marked applicable, as specified in Appendix C.

Rationale: Adherence to NASA standards. JPR 8080.5, JSC Design and Procedural Standards provides design and procedural requirements for any human spaceflight program, project, spacecraft, system, or end item.

3.3 Design and Construction

[R.LIDS.1108.1] Fastener - Threaded Ends

The iLIDS threaded ends of IVA and EVA screws and bolts extending more than 0.12 in. shall be capped to protect against sharp threads.

Rationale: This is to protect the crew from injury due to sharp edges in accordance with SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T), Section 6.3.3.6.

[R.LIDS.1108.2] Fastener - Maintenance Force

iLIDS on-orbit maintainable IVA fasteners shall require no greater than 20 lbf for engagement or disengagement with ratchet-type tools.

Rationale: The value accommodates the strength limitations of the 5th percentile male population, as stated by SSP 41000, System Specification for the

International Space Station, Section 3.3.7.3.2, which is derived from SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T), Section 4.9.3.B.

[R.LIDS.1108.3] Fastener - Maintenance Torque

iLIDS on-orbit maintainable IVA fasteners shall require no greater than 11 ft-lb torque for engagement or disengagement with driver type tools.

Rationale: The value accommodates the strength limitations of the 5th percentile male population as stated by SSP 41000, System Specification for the International Space Station, Section 3.3.7.3.2, which is derived from SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T), Section 4.9.3.B.

[R.LIDS.1108.4] IVA Toolbox Compatibility

iLIDS mounting fasteners used on guide petals and electrical boxes shall be selected to be compatible with IVA tool box assembly part number SEG33113668-301.

Rationale: This requirement adheres to approved standards to support on-orbit maintenance. The standard tool list is comprised of tools to be used for Orbital Replacement Unit (ORU) removal and replacement. The IVA tool box is in accordance with JSC 28533, ISS Catalogue of IVA GFE FCE.

[R.LIDS.1117] Fastener Integrity

iLIDS fasteners shall be in accordance with JPR 8730.2, JSC Fastener Integrity Testing Program.

Rationale: The iLIDS contains numerous safety-critical fasteners whose properties are crucial to the safe operation of the iLIDS. Counterfeit or substandard fasteners could cause a structural failure of the iLIDS and result in a catastrophic hazard.

3.3.1 Materials, Processes and Parts

3.3.1.1 Materials and Processes

[R.LIDS.0116] Flight Hardware

Materials and processes for flight hardware shall meet the requirements of NASA-STD-6016, Standard Material & Process Requirements for Spacecraft as implemented by JSC-27301, Materials Control Plan for JSC Flight Hardware.

Rationale: The NASA standard covers generic Materials and Process requirements. The iLIDS will utilize JSC-27301, Materials Control Plan for JSC Flight Hardware as a specific implementation to meet NASA-STD-6016. JSC-27301 also covers workmanship standards for mechanical and electrical hardware and implements SSP 30233, Space Station Requirements for Materials and Processes.

3.3.1.2 Electrical, Electronic and Electromechanical Parts

[R.LIDS.0120] Electrical, Electronic, and Electromechanical Parts Selection

The iLIDS shall comply with the design requirements contained in JSC-64924, iLIDS Electrical, Electronic, and Electromechanical (EEE) Parts Management and Implementation Plan.

Rationale: This plan defines the requirements, processes and policies for an EEE Parts Control Program for the Project.

[R.LIDS.5030] iLIDS-to-Host Vehicle Electrical Interface

The iLIDS shall provide the electrical connections for the electrical interface between the iLIDS and the host vehicle as defined in JSC-65795, NDS IDD, figure NDS-to-Host Vehicle Electrical Interface.

Rationale: The IDD figure defines NDS connector to remote mounted box connector interfaces for both power and communication to the iLIDS as well as power and data transfer through iLIDS.

[R.LIDS.5036] iLIDS Tunnel Connections-to-Host Vehicle Electrical Interface (Excluding -302)

The iLIDS (excluding -302) shall provide electrical connections to the host vehicle as defined in JSC-65795, NDS IDD, figure NDS (excluding -302) Tunnel Connections-to-Host Vehicle Electrical Interface.

Rationale: The vehicle interface has a separate connector for power and data, unlike the iLIDS umbilical interface, which combines power and data.

[R.LIDS.5037] Host Interface Connector Pinouts

The iLIDS shall comply with the Host Interface Connector Pinouts as defined in JSC-65795, NDS IDD, Appendix F.

Rationale: The vehicle interface has a separate connector for power and data, unlike the iLIDS umbilical interface, which combines power and data.

[R.LIDS.5038] iLIDS Box Connections-to-Host Vehicle Electrical Interface (Excluding -302)

The iLIDS (excluding -302) shall provide electrical connections to the host vehicle as defined in JSC-65795, NDS IDD, figure NDS (excluding -302) Box Connections-to-Host Vehicle Electrical Interface.

Rationale: The IDD figure defines the required host interfaces for both power and data to the iLIDS electrical boxes.

3.3.2 Structural Design

[R.LIDS.0124] Structural Design and Verification Requirements

The iLIDS shall be designed and verified to meet the requirements of SSP 30559 Structural Design and Verification Requirements.

Exception: SSP 30559, Section 3.1.9.3 (Dewars) and 3.1.9.7 (Burst Discs) are not applicable.

Rationale: This requirement adheres to approved standards. For launch and unmated cases, the shuttle factors of safety will be used.

[R.LIDS.0127] Fracture Control Design

The iLIDS shall implement the fracture control requirements specified in NASA-STD-5019, Fracture Control Requirements for Spaceflight Hardware.

Rationale: Fracture control implementation is mandatory to ensure safety of the manned space systems. Implementation of fracture control is necessary to prevent premature failure due to flaws. The procedure for meeting these requirements is found in JSC-25863B, Fracture Control Plan for JSC Flight Hardware. In the case of conflict, the technical requirements of NASA-STD-5019 take precedence over the technical requirements cited in applicable documents or referenced guidance documents.

[R.LIDS.0128] Mechanisms

The iLIDS shall comply with Section 1 through Section 4 of NASA-STD-5017, Design and Development Requirements for Mechanisms.

Rationale: This requirement adheres to approved standards.

3.3.3 Nameplates and Product Marking

[R.LIDS.0136] General Identification Marking Requirements

The iLIDS shall use nameplates and product marking in accordance with PRC-9002, Process Specification for Part Marking.

Rationale: This is in accordance with approved standards.

[R.LIDS.0137] Nomenclature Plan

iLIDS nameplates and product marking shall use operational nomenclature related to on-orbit operations, which shall conform to SSP 50254, Operations Nomenclature.

Rationale: The iLIDS shall adhere to standards currently in use for ISS hardware markings. Labeling applicable only to ground-based (nonoperational) functions may use other common technical terms. This is in accordance with SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T), Section 9.5.3.1.2 (D).

[R.LIDS.0286] Mounting/Alignment Labels/Codes

The iLIDS shall be labeled or coded to identify proper mounting alignment.

Rationale: Labels provide contextual information to help assure that ground crewmembers do not attempt to install an iLIDS incorrectly; such an attempt could damage the iLIDS or the interfaces to the vehicle. Each iLIDS is verified for flight in its designed orientation and configuration.

3.3.4 Workmanship

[R.LIDS.0294] Surface Cleanliness

iLIDS surfaces shall at a minimum be Visibly Clean (VC) Sensitive in accordance with SN-C-0005, Contamination Control Requirements for the Space Shuttle Program upon delivery for integration.

Rationale: The iLIDS may require a more stringent level of cleanliness if the installation has proximity or exposure to more sensitive surfaces. Areas that are inaccessible in the final assembly and that may act as contamination sources while on-orbit shall be cleaned to the VC Sensitive level of JSC SN-C-0005, Contamination Control Requirements for the Space Shuttle Program before close-out, as specified in SSP 30426, Space Station External Contamination Control Requirements, Section 3.2.1.1.

[R.LIDS.0298] iLIDS-to-Vehicle Interface Seal Cleanliness

The iLIDS-to-vehicle interface, seal gland, and seals shall at a minimum be Visibly Clean (VC) Highly Sensitive in accordance with SN-C-0005, Space Shuttle Contamination Control Requirements upon delivery for integration.

Rationale: The ISS levies a minimum VC Sensitive level for Space Station components and user hardware per SSP 30426, Space Station External Contamination Control Requirements. iLIDS-to-vehicle interface requires a higher VC Highly Sensitive level. This requirement is in accordance with SN-C-0005, Space Shuttle Contamination Control Requirements, Table A.2.

[R.LIDS.1093] iLIDS-to-iLIDS Interface Seal Cleanliness

The iLIDS-to-iLIDS interface, seal gland, and seals shall at a minimum be Visibly Clean (VC) Highly Sensitive in accordance with SN-C-0005, Space Shuttle Contamination Control Requirements upon delivery for integration.

Rationale: The ISS levies a minimum VC Sensitive level for Space Station components and user hardware per SSP 30426, Space Station External Contamination Control Requirements. iLIDS-to-iLIDS interface requires a higher VC Highly Sensitive level. This requirement is in accordance with SN-C-0005, Space Shuttle Contamination Control Requirements, Table A.2.

3.3.5 Human Engineering

[R.LIDS.0158] Anthropometry

The iLIDS internal hardware shall provide fit, access, reach, view, and operation of human-system interfaces in crew functional areas for unsuited crewmembers for the 5th percentile Japanese female to the 95th percentile American male anthropometric size measurement.

Rationale: This requirement is in accordance with SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T), Section 3.3.

[R.LIDS.0159] Range of Motion

Aspects of the iLIDS with which unsuited IVA crewmembers physically interact during planned tasks shall be within the ranges of motion provided in SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T), Figure 3.3.2.3.1-1.

Rationale: This requirement is in accordance with SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T), Section 3.3.

3.3.5.1 Strength

[R.LIDS.1084] Strength

iLIDS internal hardware, which will have a crew interface under normal operations, shall accommodate the strength limitations of the 5th percentile American female in accordance with SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T), Section 4.9.

Rationale: This is in accordance with approved standards.

3.3.5.2 Natural and Induced Environment

[R.LIDS.0162] IVA Crew-Induced Loads

The iLIDS internal structure shall meet requirements specified herein when exposed to IVA-crew induced loading as specified in SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T), Section 8.8.3.3.b.

Rationale: System components and hardware with which the crew interacts during nominal operations on-orbit must be able to withstand incidental contact by crewmembers without creating a hazard.

3.3.5.3 IVA Crew Safety

[R.LIDS.0185] Corners and Edges

iLIDS corners and edges to which the IVA crew is expected to be exposed during normal operations shall be rounded, as specified in SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T) to protect the crew from injury due to sharp edges and corners.

Rationale: This requirement is in accordance with SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T), Sections 6.3.3.1, 6.3.3.2, 6.3.3.3, and 6.3.3.11. The host vehicle is responsible for the -302 passage cover. Since implementation is unknown, all items located within the internal passageways of the -302 will be considered exposed and need to meet the sharp edge requirement.

[R.LIDS.0186] Loose Equipment

Any iLIDS loose equipment, except for equipment with functional sharp edges, shall have corners and edges rounded, as specified in SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T) to protect the crew from injury due to sharp edges and corners.

Rationale: This requirement is in accordance with SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T), Sections 6.3.3.1, 6.3.3.2, 6.3.3.3, and 6.3.3.11.

[R.LIDS.0187] Burrs

Any iLIDS exposed surfaces accessible to IVA crew shall be smooth and free of burrs.

Rationale: Removal of burrs can help to prevent personnel injury and damage to protective equipment from sharp edges during normal operations.

[R.LIDS.0188] Pinch Points

The iLIDS shall prevent pinch points from injuring the IVA crew.

Rationale: Pinch points can cause injury to the crew, but may exist for the nominal function of equipment (i.e., equipment panels). This may be avoided by locating pinch points out of the reach of the crew or providing guards to eliminate the potential to cause injury.

[R.LIDS.0189] IVA Touch Temperature

iLIDS surfaces, which are subject to IVA crewmember contact, shall meet the touch temperature requirements as specified in SSP 50021, Safety Requirements Document, Section. 3.3.6.12.1, Internal Volume Touch Temperature.

Exception: IVA touch temperature limits may not be met for some time after the two vehicles have completed docking until the warm-up period is complete. The warm-up period will be characterized in JSC 65795, NDS IDD.

Rationale: iLIDS internal surface temperatures must be maintained within the touch temperature limits to prevent crewmember injury from continuous and momentary contact.

[R.LIDS.0190] IVA Labeling

The iLIDS shall provide labels for crew interfaces, in accordance with SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T).

Rationale: This is to allow for identification of relevant features.

[R.LIDS.0192] Language

The iLIDS shall use text written in the American English language, as specified by Webster's New World Dictionary of American English.

Rationale: The intent of this requirement is to ensure as much commonality and consistency as possible in written text (i.e., language and spelling) across vehicle subsystems and across ISS systems. This will facilitate learning and minimize interface-induced crew error.

[R.LIDS.1104] Crew Protection for Electrical Shock

The iLIDS shall provide protection for the crew from electrical hazards in accordance with SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T), Section 6.4.3.

Rationale: The crew must be protected from potentially catastrophic electrical shock from the iLIDS electrical systems. This requirement is in accordance with SSP 50021, Safety Requirements Document, Section 3.3.6.8.2.

[R.LIDS.1105] IVA Exposed Circular Holes

Any exposed round or slotted holes on the iLIDS accessible to IVA crew that are uncovered shall be less than 0.4 in. or greater than 1.0 in. in diameter for equipment located inside iLIDS.

Rationale: Holes should be sized either small enough to prevent crewmember finger entry or large enough such that crewmember fingers cannot be stuck or injured. This requirement is in accordance with SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T), Section 6.3.3.4.

3.3.6 Safety

[R.LIDS.0197] Hazard Analysis and Safety Risk Assessment

A safety hazard analysis and safety risk assessment shall be performed for the iLIDS, as specified in SSP 30309, Safety Analysis and Risk Assessment Requirements Document.

Rationale: The foremost consideration for resolving hazards, identified by the hazard analysis process, is to eliminate hazards by removing hazard sources and hazardous operations. The methods for controlling critical and catastrophic hazards are failure tolerance and DFMR.

[R.LIDS.1092] Control System Safety Requirements

The iLIDS shall be designed in accordance with SSP 50038, Computer-Based Control System Safety Requirements.

Rationale: Compliance with ISS program safety requirements. Verification of this requirement may be satisfied via a combination of hazard controls at the iLIDS level and at the integrated-system level (including both the VV and ISS). In areas where the iLIDS cannot meet this requirement alone, the required integrated hazard controls will be documented as an interface requirement in the appropriate ICD/IDD, and the hazard reports will reference those requirements as appropriate. Personnel considered include all flight and ground crews.

[R.LIDS.1102] Design For Minimum Risk

iLIDS hazards related to DFMR areas of design shall be controlled by the safety-related properties and characteristics of the design. The failure tolerance criteria are only to be applied to these designs as necessary to ensure that credible failures that may affect the design do not invalidate the safety-related properties of the design.

Rationale: This requirement is in accordance with SSP 41000, System Specification for the International Space Station, Section 3.3.6.1.2. DFMR are areas where hazards are controlled by specification requirements that specify safety-related properties and characteristics of the design that have been baselined by the ISS program requirements rather than failure tolerance criteria. The failure tolerance criteria of R.LIDS.0106 will only be applied to these designs as necessary to ensure that credible failures that may affect the design do not invalidate the safety-related properties of the design. For example, a pressure vessel shall be certified safe based upon its inherent properties to withstand pressure loading that have been verified by analysis and qualification and acceptance testing; however, failure tolerance must be imposed upon external systems that might affect the vessel, such as a tank heater, to ensure that failures of the heater do not cause the pressure to exceed the Maximum Design Pressure (MDP) of the pressure vessel. Examples are mechanisms, structures, glass, pressure vessels, pressurized lines and fittings, functional pyrotechnic devices, material compatibility, flammability, etc.

[R.LIDS.1103] Pyrotechnic Operated Devices (Excluding -302)

The iLIDS (excluding -302) shall provide pyrotechnic devices designed and tested to the requirements of JSC 62809, Human Rated Spacecraft Pyrotechnic Specification.

Exception:

- a. Exception is taken to JSC 62809 Sections 3.1, 3.2.2, 3.6.18, 3.6.19, 3.6.20, 3.6.24.1, 3.6.24.2, 3.6.24.3, 3.6.26.1, 4.1.3, 4.4.9, 4.5.1.6, 4.5.2.4, 4.5.2.5, 7.3.3, 7.3.4, 8.1, 8.2, 8.2.4, 8.3 to 8.3.6, 8.4.7, 8.5.1, and 8.5.2. Sections noted are not verifiable by the iLIDS project.
- b. Exception is taken to JSC 62809 Section 3.5.3. Procurement of hexanitrostilbene (HNS) explosive materials shall be in accordance with JSC 65877, Specification for HNS Explosive.

Rationale: iLIDS pyrotechnic devices must meet pyrotechnic requirements to ensure safe pyrotechnic design and operation. This requirement is in accordance with SSP 50021, Safety Requirements Document, Section 3.3.6.5.1.3.

[R.LIDS.1106] Verifiable Seal Leakage Paths

The iLIDS project shall provide for redundancy and verifiability requirements for leak paths through the pressurized module to the external environment in accordance with the criteria listed in the Seal Redundancy and Verifiability Requirements table.

Table 3.3-1 - Seal Redundancy and Verifiability

Seal	Redundancy and verifiability requirements ^{2,3,4,5}	
	D ≤ 6.0 in.	D > 6.0 in.
Feed-through connections ¹	A	B
Host vehicle Interface	A	B
Docking	A	B

Notes:

- (1) Includes valves, gages, transducers, etc.
- (2) D = Major diameter of the seal
- (3) A = Interface shall have two seals. The interface shall be verifiable prior to launch.
- (4) B = Interface shall have two seals. Each seal shall be verifiable prior to launch.
- (5) The interface may be verified in flight after docking via vestibule pressurization and leak check prior to hatch opening.

Rationale: This requirement is derived from SSP 50021, Safety Requirements Document, section 3.2.2.7, but removes the requirement for on-orbit individual seal leakage verification for seals with a diameter greater than 6 in.; the requirement was tailored to be consistent with current docking and berthing operations on the ISS.

3.3.7 Operational Lifetime

[R.LIDS.0201] On-Orbit Design Life - Long Duration (-302)

The iLIDS (-302) shall be designed to meet a minimum of 15 years of low earth orbit design life without maintenance.

Rationale: The current manifest shows a 10-year ISS life after adapter delivery. In order to avoid recertification in the event of ISS life extension, iLIDS (-302) will certify to 15 years. This equates to a Mean Time To Failure (MTTF) of 15 years.

[R.LIDS.0202] iLIDS On-Orbit Design Life without Maintenance - Short Duration (Excluding -302)

The iLIDS (excluding -302) shall be designed to meet a minimum of 231 days of low earth orbit design life with no maintenance.

Rationale: The 231 days are as follows:

- a. *Unmated operations on-orbit: 21 days*
 - *Ultraviolet exposure not to exceed 214 equivalent sun hours (TBR-212)*
- b. *Mated mission duration: 210 days*

[R.LIDS.0203] Shelf Life

The iLIDS shall be designed to meet a minimum 5-year shelf life.

Rationale: The intent of this requirement is to specify a minimum life prior to required maintenance. The shelf life is derived from the longest time between manufacture and delivery of the iLIDS. This will be verified by the Limited Life Item List (LLIL).

[R.LIDS.0206] iLIDS Passive Mode Docking/Undocking Cycles

The iLIDS shall be capable of a minimum of 70 passive mode docking/undocking operations.

Rationale: This includes 20 ground operations and 50 flight cycles. Fifty cycles is calculated by a 15-year life with 3 missions per year and a margin of 5. The cycles are defined as a full docking/undocking sequence. The 70 Passive mode docking/undocking cycle operations does not account for component-level cycles (i.e., flex-drive, actuators, etc.). Note: Guide petal removal/replacement is not part of the nominal mission therefore the 20 ground cycles and 50 flight cycles do not apply.

[R.LIDS.1060] iLIDS Active Mode Docking/Undocking Cycles (Excluding -302)

The iLIDS (excluding -302) shall be capable of a minimum of 24 active mode docking/undocking operations.

Rationale: This includes 20 ground operation cycles and 4 flight cycles. The cycles are defined as a full docking/undocking sequence. The 24 active mode docking/undocking cycle operations does not account for component-level cycles

(i.e., flex-drive, actuators, etc.). Note: Guide petal removal/replacement is not part of the nominal mission therefore the 20 ground cycles and 4 flight cycles do not apply.

[R.LIDS.0207] Launch

The iLIDS shall be designed to meet a minimum of one launch.

Rationale: The iLIDS must survive the minimum cycles for launch in order to meet operational life. Launch includes one Earth launch.

3.3.8 Electrical Parts and System Design, Construction, and Verification

[R.LIDS.1120] iLIDS Electrical Boxes

iLIDS electrical boxes shall include captive fasteners.

Rationale: This is to allow the electrical boxes to be compatible with potential IVA replacement. However, IVA replacement must be considered on a case-by-case basis depending on integration with the host vehicle.

[R.LIDS.1126] Host Electrical Power Interface - Modularity

The iLIDS shall allow for reconfiguration to alternate host vehicle power values.

Rationale: An electrical power interface is needed to allow the host vehicle to power the iLIDS. This is the power for iLIDS consumption, which is not to be confused with the host vehicle pass-through power to the mating vehicle. Host vehicles may operate with different nominal power configurations (e.g., 28 Vdc, 120 Vdc, etc.). This requirement allows for a modular power system to accommodate multiple hosts. The host vehicle power must be specified at the time of the delivered docking system buildup; the system cannot accept multiple power configurations at the same time.

3.4 Logistics

3.4.1 Maintenance

3.4.1.1 On-Orbit Maintenance

No on orbit maintenance is planned; however, refer to R.LIDS.1108.1 through R.LIDS.1108.4 and R.LIDS.1120 for requirements on captive fasteners to support potential on-orbit replacement of electrical boxes.

3.4.1.2 Ground Maintenance

[R.LIDS.0229] Tool Clearance

The iLIDS shall provide tool clearances for tool installation and actuation for all tool interfaces during ground maintenance.

Rationale: No further rationale is required.

4 GROUND SUPPORT EQUIPMENT REQUIREMENTS

4.1 Ground Support Equipment Interface Definition

The iLIDS incorporates the following interfaces to GSE:

- Power
- C&DH
- Structural/Mechanical

The iLIDS-to-GSE interface is illustrated in Figure 4.1-1 - iLIDS to GSE Interface Diagram.

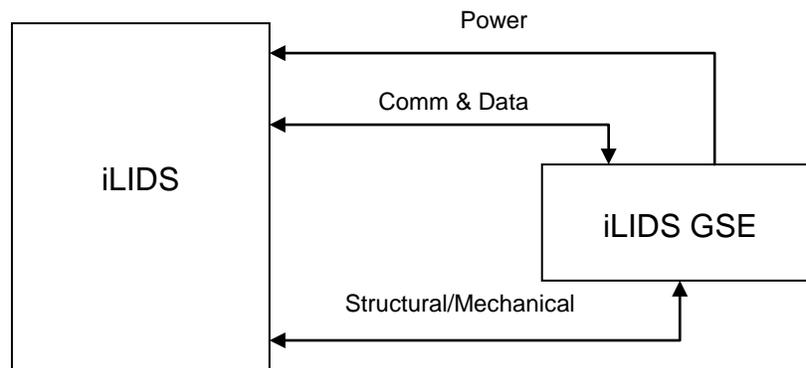


Figure 4.1-1 - iLIDS to GSE Interface Diagram

[R.LIDS.0043] GSE Command and Data Handling Interface

The iLIDS shall provide a unique C&DH interface for GSE separate from the host vehicle interface to allow ground check-out and testing.

Rationale: A separate interface is needed to allow check-out of the system after installation on the host vehicle. This allows for docking system evaluation without requiring the host vehicle's computer system.

[R.LIDS.0044] Structural Interface

The iLIDS shall provide a structural interface for GSE.

Rationale: An interface between the iLIDS and GSE is needed during ground testing.

4.2 GSE Requirements

4.2.1 General

[R.LIDS.1083] General GSE Requirements

All iLIDS GSE shall conform to NASA-STD-5005, Standard for the Design and Fabrication of Ground Support Equipment.

Rationale: These NASA standards for GSE and GSE hardware must be maintained and controlled as Class I. The standards ensure that uniform engineering practices, methods, and essential criteria are employed in the design of GSE used within NASA.

4.2.2 Ground Support and Transportation

The iLIDS ground support and transportation loads requirements are decomposed in [R.LIDS.0027] by meeting all functional and performance requirements during and after exposure to the loads defined in JSC-65970, iLIDS Thermal and Induced Environments (iLIDS TIES).

4.2.3 Ground Crew Interfaces

[R.LIDS.0256] Ground Labeling

Labels used on the iLIDS, including iLIDS GSE, for ground crew interface controls and indicators, assembly, and handling shall not interfere with on-orbit crew interface labeling and shall be either covered or marked out before flight if the labels provide no function for the crew.

Rationale: This is in accordance with SSP 57000, Pressurized Payloads Interface Requirements Document, Appendix C, Section C.3.1. Project will endeavor to design labels such that mark-outs are not required.

[R.LIDS.0259] Hazards Labeling

The iLIDS GSE shall provide labels to identify hazards to ground crew or to equipment.

Rationale: Hazard labeling shall be verified by inspection. The inspection shall identify the list of equipment that is susceptible to damage or constitutes a hazard to the ground crew. This list will include the type of hazard [Electrostatic Discharge (ESD), chemical, pressurized fluid, etc.]. The verification shall be considered successful when the inspection shows that all items on the list have been labeled with hazard information.

5 PREPARATION FOR DELIVERY

5.1 Preservation

5.1.1 General Preservation Requirements

Preservation methods shall include the application of protective measures and materials to maintain the item within the appropriate cleanliness levels and to prevent damage or degradation in reliability or performance of the item when exposed to the natural and induced ground based and transportation and ground handling environments.

The requirement for preservation method and level of protection shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

5.2 Packing

5.2.1 General Packing Requirements

Packing should include military standard and special design containers used for the transportation and storage of the item.

Packing should be used in conjunction with the appropriate preservation methods, handling procedures, and methods of transport to prevent damage or degradation in reliability or performance of the item when exposed to the natural and induced ground based and transportation and ground handling environment.

Packing should be in accordance with MIL-STD-2073-2, 5.6 and SSP 50005, 11.12.3.

5.2.2 Detailed Packing Requirements

The specific details relating to unique preservation, handling, and packaging selection should be reflected in the Sustaining Engineering Plan for mission essential items, Oversized Flight Element Transportation Plans, and corporate internal procedures.

5.3 Marking and Labeling

5.3.1 General Marking and Labeling Requirements

5.3.1.1 Unit Packages, Intermediate Packages, and Exterior Shipping

Marking and labeling for shipment and storage for unit packages, intermediate packages, and exterior shipping containers shall be in accordance with MIL-STD-129 and NPR 6000.1.

5.3.1.2 Hazardous Materials

The marking of containers and other packaging for shipment and storage of hardware containing or having hazardous material characteristics shall be in accordance with Code of Federal Regulations (CFR) Title 49.

5.3.1.3 Detailed Marking and Labeling Requirements

Specific and detailed marking and labeling requirements should be reflected in the Sustaining Engineering Plan, Oversized Flight Element Transportation Plans, engineering drawings, manufacturing planning papers, and corporate internal procedures.

6 CUSTOMER IMPOSED VERIFICATION REQUIREMENTS

7 NOTES / ERRATA

Ultraviolet Radiation: The studies for ultraviolet (UV) exposure to seals and assumed mission scenario are still being conducted. The definition for UV exposure will aid in defining the scaling factor for ESH per hour on orbit. The scaling factor for ESH determines the period of time that the seal can face the sun without causing degradation of the seal. UV exposure level is highly dependent on orientation of vehicle (alpha/beta) with respect to the sun (e.g., solar facing; local vertical, local horizontal (LVLH); edge-to-the-sun). Worst case scenario of UV exposure is constrained by iLIDS seals and the ESH time. See iLIDS requirements R.LIDS.0202, R.LIDS.1113, and R.LIDS.1138 for TBR-212 placeholder. Estimated closure of open item is February 2012.

Berthing: The development of the berthing requirements document is still in-work. iLIDS Berthing requirement R.LIDS.1001 has been added as a placeholder for the future Block 1 Upgrade and includes TBS-217 for the berthing requirements document number. Estimated closure of open item is January 2012.

Ionizing Radiation: The 120V iLIDS configurations (-301 and -302) will take exception to the radiation hardness levels defined in JSC 64598, iLIDS Ionizing Radiation Control Plan. EV will be tasked to determine a value for True LET to be applied to these configurations. See requirement R.LIDS.0183 for TBS-218 placeholder. Estimated closure of open item is March 2012.

Depress/Repress Rate: The depress/repress rates documented in SSP 50808, ISS to Commercial Orbital Transportation Services (COTS) IRD, are undergoing revision and are expected to be published with the release of SSP 50808 Rev C. See requirements R.LIDS.0103 and R.LIDS.1118 for TBR-220 placeholders concerning expected updates to these values. Estimated closure of open item is February 2012.

APPENDIX A ACRONYMS AND ABBREVIATIONS

6-DOF	Six Degrees of Freedom
ANSI	American National Standards Institute
AO	Atomic Oxygen
AWG	American Wire Gauge
baud	Symbol Rate
Btu	British Thermal Unit(s)
C&DH	Command and Data Handling
CDR	Critical Design Review
CFR	Code of Federal Regulations
CIL	Critical Items List
cm	Centimeter(s)
cm ²	Square Centimeters
°C	Degrees Celsius
°F	Degrees Fahrenheit
DC	Direct Current
DCN	Document Change Notice
DFMR	Design for Minimum Risk
DRM	Design Reference Mission
E3	Electromagnetic Environmental Effects
EA3	Systems Architecture and Integration Office
EAR	Export Administration Regulations
EEE	Electrical, Electronic, and Electromechanical
EMU	Extravehicular Mobility Unit
ES4	NASA Materials and Processes Division
ESD	Electrostatic Discharge
ESH	Equivalent Sun Hours
EVA	Extravehicular Activity
FDIR	Fault Detection, Isolation, and Recovery
FMEA	Failure Modes and Effect Analysis
FRAM	Flight Releasable Attachment Mechanism
ft-lb	Foot Pound
GFE	Government Furnished Equipment
GN&C	Guidance, Navigation, and Control

GSE	Ground Support Equipment
H&S	Health and Status
HCS	Hard Capture System
HNS	Hexanitrostilbene
hPa	Hectopascal(s)
Hz	Hertz
ICD	Interface Control Document
ID	Identification
IDD	Interface Definition Document
IDSS	International Docking System Standard
iLIDS	International Low Impact Docking System
in.	Inch(es)
ISS	International Space Station
IVA	Intravehicular Activity
JPR	JSC Program Requirements
JSC	Johnson Space Center
kilobaud	1000 baud
kg	Kilogram(s)
kgf-m	Kilograms Force per meter
KOZ	Keep Out Zone
kPa	Kilopascal(s)
kPa/sec	Kilopascals per Second
Lb	Pound(s)
lbf	Pound-Force
lbm	Pound-Mass
LET	Linear Energy Transfer
LIDS	Low Impact Docking System
LLIL	Limited Life Item List
LSAM	Lunar Surface Access Module
LSB	Least Significant Bit
LVLH	Local Vertical Local Horizontal
MDP	Maximum Design Pressure
MGA	Mass Growth Allowance
MIL	Military
mm	Millimeter(s)

MMOD	Micrometeoroid and Orbital Debris
MPE	Maximum Predicted Environment
ms	Millisecond(s)
MSID	Measurement Stimulation Identification
MTTF	Mean Time to Failure
NASA	National Aeronautics and Space Administration
NDS	NASA Docking System
NDSP	NASA Docking System Project
NDT	Non-Destructive Testing
NEXT	Near-End Crosstalk
NPR	NASA Processes and Requirements
NRZ	Non-Return to Zero
NSI	NASA Standard Initiator
NT	NASA Quality and Flight Equipment Division
OA	ISS Program Office
ORU	Orbital Replacement Unit
PNP	Probability of No Penetration
psia	Pounds per Square Inch Absolute
psi	Pounds per Square Inch
psi/sec	Pounds per Square Inch per Second
PV	Photovoltaic
Pyro	Pyrotechnic
RMS	Remote Manipulator System
RTD	Resistance Temperature Detector
S&MA	Safety and Mission Assurance
SCS	Soft Capture System
SEB	Single Event Burn-Out
sec	Second
SEGR	Single Event Gate Rupture
SEL	Single Event Latch-up
SEU	Single Event Upset
STD	Standard
STS	Space Transportation System
TBD	To Be Determined
TBR	To Be Resolved

TBS	To Be Specified
TIES	Thermal and Induced Environments
TMG	Thermal Micrometeoroid Garment
TPS	Thermal Protection System
TVS	Transient Voltage Suppressor
TX	Transmit
UART	Universal Asynchronous Receiver/Transmitter
UV	Ultraviolet
V	Volt
VC	Visibly Clean
Vdc	Volts Direct Current
VM	Verification Matrix
VV	Visiting Vehicle
W	Watt
W-hr	Watt-hours
W/m ² -K	Thermal transmittance, transfer of heat (in watts) through one square meter of a structure divided by the difference in temperature across the structure.

APPENDIX B DEFINITION OF TERMS

Term	Definition
Active iLIDS	An iLIDS (International Low Impact Docking System) that has electro-mechanical actuation controlled features such as linear actuators, motor driven hooks and electro-magnets. An "Active iLIDS" can only interface with a "Passive iLIDS" (see definition of Passive iLIDS below in this table).
Active Mode	A functional mode of iLIDS. An active iLIDS performs all capture and structural attachment to the passive iLIDS. See definition of Passive Mode.
Alignment	Alignment is the function that allows iLIDS to compensate and correct to the proper orientation necessary for successful soft capture.
Androgynous	Hardware that does not have distinct male or female characteristics; all hardware are identical in form and function.
Backout	A dynamic process in which a maneuvering vehicle halts its approach to the target and separates along a controlled path (within the approach/departure corridor) to a planned, safe station keeping range. A backout is normally followed by a resumed approach or breakout maneuver.
Berth	Mating method that allows connection of two vehicles with the assistance of a robotic arm or a Remote Manipulator System (RMS)-type device.
Breakout	A dynamic process in which a maneuvering vehicle alters its intercept approach to a target and separates with the intention of not immediately resuming the approach that day. A second rendezvous is necessary to reestablish intercept conditions. In emergency scenarios, the maneuvering vehicle may perform an emergency deorbit burn as part of the breakout sequence.
Bulkhead	A bulkhead is a partition inside a ship, aircraft, or large vehicle.
Bulkhead Connectors	The bulkhead connectors are those that pass through a pressurized bulkhead.
Capture	The use of a docking mechanism to bring an approaching vehicle from a free flight state to a physically connected state (but not fully constrained) with the mating vehicle. Capture enables placement of the system in a controlled orientation in preparation for hard mate. When captured, the system may be easily released and is typically unable to withstand its full mechanical loading environment.

Term	Definition
Catastrophic Hazard	A catastrophic hazard is a condition that may cause loss of life or a permanently disabling injury. It also includes a condition that may cause loss of vehicle, prior to completing its primary mission. For example, a hazard that could cause loss of Orion prior to rendezvous with the Lunar Surface Access Module (LSAM) is considered catastrophic. A hazard that may cause loss of Orion after crew evacuation, during a water landing, would not be considered catastrophic.
Checksum	Checksum is a value transmitted with a data stream, derived from the other elements in the data stream, and used to check for transmission errors in the data. If the transmitted checksum differs from the one derived by the receiving computer, a transmission error has probably occurred and the transmission is repeated.
Command	A command is an instruction to a computer to carry out an operation.
Command/Response Packet	This is a message or part of a message packaged as a fixed-size segment of data for transmission through a computer network.
Control Box	The control box is an enclosure that houses a computer system.
Control Pendant	This is a handheld control box.
Critical Hazard	A critical hazard is a condition that may cause a severe injury or occupational illness, loss of mission, or major property damage to facilities, systems, or flight hardware, but does not meet the criteria of a catastrophic hazard.
Demate	Demating is a function that can be performed by one of either two methods: undocking or unberthing. Demated also signifies structural separation once undocking/unberthing operations are complete.
Design Reference Mission (DRM)	Typical mission scenario encompassing tasks that are most likely to drive the architecture system design requirements. The DRMs are analyzed for all mission aspects from failure tolerance to hardware layout, software functionality, and design suitability.
Dock	Docking is the mating of two independently operating spacecraft or other systems in space, using independent control of the two vehicles' flight paths and attitudes during contact and capture. Docking begins at the time of initial contact of the vehicles' docking mechanisms and concludes when full rigidization of the interface is achieved.
Extravehicular Activity (EVA)	EVA operations are performed by suited crew outside the pressurized environment of a flight vehicle or habitat (during space flight or on a destination surface).

Term	Definition
Failure Detection, Isolation, and Recovery (FDIR)	Determining the occurrence of a fault/failure, determining what caused the fault/failure, and providing corrective action.
Failure Modes and Effects Analysis (FMEA)	FMEA is the study of a system and the working relationships of its elements to determine ways in which failure can occur (failure modes), and the effects of each potential failure on the system element in which it occurs on other systems.
Fault	An anomalous condition of a system, which includes hardware and software.
Fault Detection	Determine and notify fault occurrence.
Fault Tolerance	Built-in capability of a system to perform as intended in the presence of specified hardware or software faults. EVA, emergency systems, or emergency operations may not be used as a leg of fault tolerance.
Ground Support Equipment (GSE)	All equipment (implements, tools, test equipment devices, simulations, etc.) required on the ground to support appropriate ground testing or training.
Hard Capture	A hard capture is when two docking vehicles are structurally connected, sealing is complete, vestibule is ready for equalization and hatch is ready to open. This is also the state when a vehicle or payload is rigidly attached to the capture mechanism and relative motion is fully constrained.
Health and Status (H&S)	This is information on subsystem performance and flight performance, including configuration data, vehicle state data, subsystem status, failures, hazards, and measured parameters outside of normal limits.
Induced Environment	Any form of matter or energy released, radiated or modified by one component or System that could impact or influence another component or System. Includes radiated and reflected thermal energy; vibrations, aerodynamic, and shock loads; electromagnetic energy, Paschen discharge, arcing, glow discharge, spacecraft charging, and $V \times B$ voltages; debris; particulate and molecular contamination, waste water dumps; and reflections, glows, and other optical contamination.
Intravehicular Activity (IVA) maintenance	An IVA is corrective or preventive maintenance performed by the crew within the pressurized spacecraft during a mission.
iLIDS	See Definition in Sec. 3.1, and Sec. 3.1.1 of the document

Term	Definition
LIDS	Low Impact Docking System acronym from heritage design still used in legacy data utilized in iLIDS project (e.g., Command labels, requirements ID's, etc.)
Maintainable	The ability of a system to be retained in or restored to a specified condition when maintenance is performed in a stated time interval, under stated conditions, and using stated procedures and resources. Maintenance, preventative and corrective, may include identification, safing access, removal, replacement, restoration, and verification of functionality.
Mating	Mating is the mechanical connection of two vehicles, in space (via docking or berthing) or on the Earth, Moon, or Mars (via docking, berthing, or some other method). When the mating is successfully accomplished, the two vehicles are hard-mated and mated operations commence.
Mating Vehicle	In rendezvous and proximity operations, the mating vehicle performs minimal, if any maneuvers.
MMOD Shield	MMOD Shield is made up of thin Aluminum, Nextel and Kevlar materials. The MMOD shield protects iLIDS from MMOD strikes.
Orbital Replacement Unit (ORU)	A piece of equipment that can be removed and replaced with a working spare by a user or operator during the mission.
Passive iLIDS	An iLIDS that has no electro-mechanical actuation controlled features. A "Passive iLIDS" can only interface with an "Active iLIDS." (see definition of an Active iLIDS above in the Table)
Passive Mode	A functional mode of iLIDS. A passive iLIDS allows the Active iLIDS to perform all capture and structural attachment to the passive iLIDS. See definition of Active Mode.
Seal Gland	A machined groove into which a seal is installed.
Soft Capture	A soft capture is an iLIDS function where the electromagnets are used to attach mating mechanisms. This is not structural mating, but the first level of attachment.

Term	Definition
Special Processes	<p>Processes where the resulting output cannot be verified by subsequent monitoring or measurement. (e.g., deficiencies become apparent only after the product is in use or the service has been delivered). Special processes include, but are not limited to, soldering, coating/painting, cleaning, non-destructive examinations, plating, welding, brazing.</p> <p>A defense industry consensus list of special processes NDT: Liquid Penetrant, Magnetic Particle, Ultrasonics, X-ray Heat Treating: For multiple Alloy Families: Stress Relieving, Annealing, Carburizing, Nitriding, Carbonitriding, Ferritic Nitrocarburizing, Ion Nitriding, Vacuum Heat Treating, Vacuum Oil Quenching, Hardening, Induction Hardening, Furnace Brazing, Dip Brazing, Induction Brazing, Vacuum Furnace Brazing, Flame Hardening, Cryogenic Treatments, Hot Forming/Hot sizing, Die Quenching, Hipping, Hardness and Metallography to support the heat treating function</p> <p>Welding: Torch/Induction Manual Brazing, Flash Welding, Electron Beam Welding, Fusion Welding, Laser Welding, Resistance Welding, Friction/Inertia Welding, Diffusion Welding, Percussion Stud Welding.</p> <p>Coatings: Thermal Spray, Vapor Deposition, Cementation, Stripping, Coating Evaluations, Plating of Coated Parts, Heat Treating of Coatings</p> <p>Chemical Processing: Plating, Anodizing, Conversion/Phosphate Coatings, Paint and Dry Film Lubricants, Etch</p> <p>Materials Testing Laboratories: Chemical, Mechanical, Metallography & Microhardness, Hardness, Corrosion, Mechanical Test Specimen Preparation, Differential Thermal Analysis, X-Ray Diffraction, Coating Evaluations, Fastener Testing</p>
TBD	Acronym for To Be Determined. Inserting TBD indicates values or information have yet to be added, but will be determined prior to document baseline.
TBR	Acronym for To Be Resolved. Inserting TBR indicates that the information provided is tentative and is subject to change, if approved by project and program.
TBS	Acronym for To Be Specified. Inserting TBS indicates that the information provided is information that has yet to be added.
TIA/EIA-422	ANSI/TIA/EIA-422-B specifies the electrical signaling characteristics of the data link.

Term	Definition
Umbilical Systems	This system provides a link or system of links to something essential.
Undocking	Demating of spacecraft or other elements in space using independent control of the two vehicles' flight paths and attitudes during release. Undocking is done without the assistance of a robotic arm or a Remote Manipulator System (RMS)-type device.

APPENDIX C MISCELLANEOUS INFORMATION

Table C-1 - Compliance Document Applicability

JPR 8080.5 standards carry multiple requirements within each standard. For standards that have “Partially Applicable” applied, the standard is decomposed into individual shall statements and a preceding number is applied to each shall statement within the standard starting with (1). The numbering allows exception of individual sections of the JPR 8080.5 standard as well as partial applicability.

Standard	Section	Section Title	Applicability	Comments/Rationale	Requirements
JPR 8080.5	E-1	Mating Provisions for Electrical Connectors	Applicable		
JPR 8080.5	E-2	Protection of Severed Electrical Circuits	Not Applicable	iLIDS conductors are not cut using guillotine devices.	
JPR 8080.5	E-3	Electrical and Electronic Devices Protection from Reverse Polarity and/or Other Improper Electrical Inputs	Applicable		
JPR 8080.5	E-4	Electrical Connectors - Moisture Protection	Applicable		
JPR 8080.5	E-5	Electrical Connectors - Pin Assignment	Applicable		
JPR 8080.5	E-6	Corona Suppression	Applicable	Corona is applicable with the custom power supply design inside of the 120V iLIDS that has peak voltages of 300+V.	
JPR 8080.5	E-7	Electrical Components - Restrictions on Use	Applicable		
JPR 8080.5	E-8	Electrical / Electronic Supplies and Loads - Verification Tests	Applicable		
JPR 8080.5	E-9	Electrical Circuits - Deenergizing Requirement	Not Applicable	Vehicle level requirement.	
JPR 8080.5	E-10	Cleaning of Electrical and Electronic Equipment	Applicable		
JPR 8080.5	E-11	Protective Covers or Caps for Electrical Receptacles and Plugs	Applicable		

Standard	Section	Section Title	Applicability	Comments/Rationale	Requirements
JPR 8080.5	E-12	Electrical Connectors - Disconnection for Trouble-Shooting and Bench Testing	Applicable		
JPR 8080.5	E-13	Bioinstrumentation Systems - Crew Electrical Shock Protection	Not Applicable	iLIDS is not a Bioinstrumentation System.	
JPR 8080.5	E-14	Electrical Wire Harnesses -Acceptance Testing	Partially Applicable	E-14(3) is not applicable - No shipping cables.	
JPR 8080.5	E-15	Electrical Power Distribution - Overload Protection & Fault Propagation	Applicable		
JPR 8080.5	E-16	Testing Protective Devices for Electrical and Electronic Circuits	Applicable		
JPR 8080.5	E-17	Electrical and Electronic Piece Parts - Hermetic Construction	Not Applicable	Other functional requirements specified in the iLIDS PTRS will provide necessary protection from damage, the parts need not be hermetically sealed.	
JPR 8080.5	E-18	Circuitry for Automatic Shutdown of Launch Vehicle Engine(s)	Not Applicable	Reclassified as G-54.	
JPR 8080.5	E-19	Equipment Design - Power Transients	Applicable		
JPR 8080.5	E-20	Electrostatic Discharge Protection of Electronic Equipment	Applicable		
JPR 8080.5	E-21	Electrical Connectors	Not Applicable	Cancelled	
JPR 8080.5	E-22	Ionizing Radiation Effects on Electronics	Partially Applicable	E-22(2),(4)&(5) are not applicable - iLIDS will not use suggested test levels and methods for MTBF and no similarity to be used.	
JPR 8080.5	E-23	Transistors - Selection of Types	Not Applicable	Cancelled	
JPR 8080.5	E-24	Electrical Wire and Cable Acceptance Tests	Applicable		
JPR 8080.5	E-25	Protecting Electrical Wires, Cables, Bundles, and Harnesses	Applicable		
JPR 8080.5	F-1	Restriction Requirements - Pressurized Components	Not Applicable	No relative hardware on iLIDS.	

Standard	Section	Section Title	Applicability	Comments/Rationale	Requirements
JPR 8080.5	F-2	Water Separators in a Zero-Gravity Environment	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-3	Service Points - Positive Protection From Interchangeability of Fluid Service Lines	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-4	Ground Service Points - Fluid Systems	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-5	Fluid Lines - Separation Provisions	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-6	Temperature and Pressure Monitoring Requirements for Potentially Hazardous Reactive Fluids	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-7	Capping of Servicing and Test Ports not Required to Function in Flight	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-8	Fluid System Components Whose Function is Dependent on Direction of Flow - Protection Against Incorrect Installation	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-9	Spacecraft Venting - Induced Perturbing Forces	Not Applicable	iLIDS is not a spacecraft.	
JPR 8080.5	F-10	Nozzle and Vents - Protection Prior to Launch	Not Applicable	iLIDS has no relative hardware	
JPR 8080.5	F-11	Fluid Supplies - Verification Test Provisions	Not Applicable	iLIDS block1 has no fluid transfer requirements. This will be unverifiable.	
JPR 8080.5	F-12	Protection of Pressurized Systems from Damage Due to Pressurant Depletion -Support Equipment	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-13	Habitable Module Pressure - Venting Restriction	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-14	Crew Cabin Module Ventilating Fans - Protection From Debris	Not Applicable	Cancelled	
JPR 8080.5	F-15	Separation of Hypergolic Reactants	Not Applicable	iLIDS has no fluid transfer requirements.	

Standard	Section	Section Title	Applicability	Comments/Rationale	Requirements
JPR 8080.5	F-16	Fluid Line Routing Installation	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-17	Cleanliness of Flowing Fluids and Associated Systems	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-18	Pressure Relief Valves - Standardization of Functional Testing	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-19	Cleanliness Protection for Fluid Systems	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-20	Fluid Systems - Cleanliness	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-21	Purge Gases - Dew Point Requirements	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-22	Pressure Garments - Protection Against Failure Propagation	Not Applicable	Relative hardware doesn't exist on iLIDS.	
JPR 8080.5	F-23	Qualification Fluid	Not Applicable	Reclassified as G-53.	
JPR 8080.5	F-24	Fluid Systems - Design for Flushing and Draining	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-25	Toxicity - Fluids Contained in Systems in the Crew Compartment	Applicable		
JPR 8080.5	F-26	Atmosphere Pressure and Composition Control	Not Applicable	iLIDS is not a Spacecraft or habitable module.	
JPR 8080.5	F-27	Liquid or Gas Containers - Verification of Contents	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-28	Use of Halogen Method for Coolant System Leak Detection	Not Applicable	Cancelled	
JPR 8080.5	F-29	Filter Protection of Sensitive Fluid Components	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	F-30	Pressure Relief for Pressure Vessels/Systems	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	G-1	Equipment Accessibility for Maintenance	Partially Applicable	G-1(4)&(5) are not applicable - iLIDS is not habitable.	
JPR 8080.5	G-2	Separation of Redundant Systems	Applicable		

Standard	Section	Section Title	Applicability	Comments/Rationale	Requirements
JPR 8080.5	G-3	Electrical and Fluid Systems Checkout Provisions	Partially Applicable	Applicable to only electrical systems, iLIDS (at this time) does not transfer any fluids.	
JPR 8080.5	G-4	Protection from Debris - Electrical & Mechanical Systems	Partially Applicable	G-4(4) is not applicable - no fluids in iLIDS.	R.LIDS.0295
JPR 8080.5	G-5	Prevention of Debris - Electrical & Mechanical Systems.	Applicable		
JPR 8080.5	G-6	Redundancy Requirements	Not Applicable	Cancelled	
JPR 8080.5	G-7	Time Displays	Not Applicable	Cancelled	
JPR 8080.5	G-8	Design for Redundancy Verification	Applicable		
JPR 8080.5	G-9	Shatterable Material - Exclusion	Not Applicable	Shatterable materials are not consistent with the iLIDS design and functions. It is not foreseeable that iLIDS would include a shatterable material.	
JPR 8080.5	G-10	Parts identification	Partially Applicable	G-10 (3) is not applicable - beyond the capability of the iLIDS project	
JPR 8080.5	G-11	Procurement Document Identification for Human Spaceflight Items	Applicable		
JPR 8080.5	G-12	Application of Previous Qualification Test Data	Not Applicable	iLIDS has no previous qualification data.	
JPR 8080.5	G-13	Shipping and Handling Protection for Spaceflight Hardware	Not Applicable	Cancelled	
JPR 8080.5	G-14	Classification of Flight and Non-Flight Equipment	Partially Applicable	G-14(2) is not applicable - Nonflight equipment	
JPR 8080.5	G-15	Resolution of Flight Equipment Failures/Anomalies Prior to Launch	Applicable		
JPR 8080.5	G-16	Operational Limits on Temperature-Controlled Equipment	Applicable		R.LIDS.0091
JPR 8080.5	G-17	Separate Stock for Spaceflight Parts and Materials	Applicable		R.LIDS.0136
JPR 8080.5	G-18	Safety Precautions - Test and Operating Procedures	Applicable		

Standard	Section	Section Title	Applicability	Comments/Rationale	Requirements
JPR 8080.5	G-19	Special Processes- Identification of Drawings	Applicable		
JPR 8080.5	G-20	Spacecraft Equipment - Protection from Liquids During Ground Operations	Not Applicable	No plan to locate iLIDS where it is subject to liquid leaks	
JPR 8080.5	G-21	Spacecraft Equipment - Moisture Protection	Applicable		R.LIDS.1077
JPR 8080.5	G-22	Parts Identification	Applicable		R.LIDS.0136, R.LIDS.0137
JPR 8080.5	G-23	Pressure Garment Wiring - Ignition of Materials by Electrical Current	Not Applicable	No relative hardware on iLIDS.	
JPR 8080.5	G-24	Protecting Flight Equipment From Support Equipment	Applicable		
JPR 8080.5	G-25	Thermal Design and Analysis	Applicable		
JPR 8080.5	G-26	Internally Generated Radiation	Not Applicable	No laser sources on iLIDS.	
JPR 8080.5	G-27	Fire control	Partially Applicable	G-27(2) & (3) not applicable - iLIDS does not provide fire detection or suppression capability.	
JPR 8080.5	G-28	Sealing - Solid Propellant Rocket Motors	Not Applicable	No relative hardware on iLIDS.	
JPR 8080.5	G-29	Reentry Propulsion Subsystem In-Flight Test	Not Applicable	No relative hardware on iLIDS.	
JPR 8080.5	G-30	Switch Protection Devices	Not Applicable	Cancelled	
JPR 8080.5	G-31	Detachable Crew- Operated Actuating Tools	Not Applicable	No on-orbit maintenance	
JPR 8080.5	G-32	Measurement Systems That Display Flight information to the Crew - Indication of Failure	Not Applicable	Cancelled	
JPR 8080.5	G-33	Surface Temperatures	Not Applicable	Cancelled	
JPR 8080.5	G-34	Extravehicular Activity Electronic Connectors	Not Applicable	Cancelled	
JPR 8080.5	G-35	Enclosure Panels External to the Habitable Modules	Not Applicable	Cancelled	
JPR 8080.5	G-36	Thermal Blankets - Extravehicular Activity	Not Applicable	Cancelled	
JPR 8080.5	G-37	Verification of External Visibility	Not Applicable	iLIDS is not a crewed spacecraft.	

Standard	Section	Section Title	Applicability	Comments/Rationale	Requirements
JPR 8080.5	G-38	Pressurization Or Repressurization-Preventing Ingress of Undesirable Elements	Not Applicable	iLIDS is not a crewed spacecraft.	
JPR 8080.5	G-39	Lightning Protection Design	Not Applicable	iLIDS is not a spacecraft.	
JPR 8080.5	G-40	Radioactive Luminescent Devices	Not Applicable	No radioactive materials on iLIDS.	
JPR 8080.5	G-41	Acoustic Noise Criteria	Not Applicable	Cancelled	
JPR 8080.5	G-42	Solar Wind Environment	Not Applicable	Cancelled	
JPR 8080.5	G-43	Centralized Subsystem Controls	Not Applicable	Cancelled	
JPR 8080.5	G-44	Attitude Control Authority	Not Applicable	Vehicle requirement.	
JPR 8080.5	G-45	Solid Propellant Rocket Motors	Not Applicable	No relative hardware on iLIDS.	
JPR 8080.5	G-46	Separation Sensing System - Structural Deformation	Applicable		
JPR 8080.5	G-47	Gyroscopes - Verification of Operational Status	Not Applicable	No relative hardware on iLIDS.	
JPR 8080.5	G-48	Onboard Experiments - Required Preinstallation Checklist	Not Applicable	No relative hardware on iLIDS.	
JPR 8080.5	G-49	Temperature and Pressure Monitoring Requirements of Hydrogen Peroxide System	Not Applicable	Cancelled	
JPR 8080.5	G-50	Direct Procurement of Parts	Applicable		
JPR 8080.5	G-51	Flight Hardware - Restriction on Use for Training	Not Applicable	Non-functional requirement.	
JPR 8080.5	G-52	Reuse of Flight Equipment	Not Applicable	iLIDS is not intended to be reused.	
JPR 8080.5	G-53	Reverification	Applicable		
JPR 8080.5	G-54	Automatic Shutdown of Launch Vehicle Engines(S)	Not Applicable	No relative hardware on iLIDS.	
JPR 8080.5	MP-1	Materials And Processes Control	Applicable		R.LIDS.0116
JPR 8080.5	MP-2	Flammability of Wiring Material	Not Applicable	Cancelled	

Standard	Section	Section Title	Applicability	Comments/Rationale	Requirements
JPR 8080.5	MP-3	Toxicity of Materials Used in Crew Compartments - Wire Insulation, Ties, Identification Marks, and Protective Covering	Not Applicable	Cancelled	
JPR 8080.5	MP-4	Metals and Metal Couples - Restriction on Use	Not Applicable	Cancelled	
JPR 8080.5	MP-5	Solutions Which Contain Ethylene Glycol - Requirements for Silver Chelating Agent	Not Applicable	Cancelled	
JPR 8080.5	MP-6	Toxicity - Requirements for Nonmetallic Materials Proposed for Use within Crew Compartment	Not Applicable	Cancelled	
JPR 8080.5	MP-7	Material Detrimental to Electrical Connectors	Not Applicable	Cancelled	
JPR 8080.5	MP-8	Leak Detectors - Wetting Agents	Not Applicable	Cancelled	
JPR 8080.5	MP-9	Mercury Limitations in Breathable Atmospheres	Not Applicable	No relative hardware on iLIDS.	
JPR 8080.5	MP-10	Liquid Locking Compounds - Restrictions and Controls	Not Applicable	Cancelled	
JPR 8080.5	MP-11	Pressure Vessel Documentation	Not Applicable	iLIDS is not a pressure vessel.	
JPR 8080.5	MP-12	Multilayer Blanket Bake-Out	Not Applicable	Cancelled	
JPR 8080.5	MP-13	Pressure Vessel / Special Pressurized Equipment Design and Certification	Not Applicable	iLIDS contain no relevant hardware.	
JPR 8080.5	MP-14	Silicate Ester Coolant System Design	Not Applicable	Cancelled	
JPR 8080.5	MP-15	Mercury - Restriction on Use	Not Applicable	Cancelled	
JPR 8080.5	MP-16	Restriction on Coatings for Areas Subject to Abrasion	Not Applicable	Cancelled	
JPR 8080.5	MP-17	Radiographic Inspection of Brazed and Welded Tubing Joints	Not Applicable	Cancelled	
JPR 8080.5	MP-18	Etching Fluorocarbon Insulated Electrical Wire	Not Applicable	Cancelled	

Standard	Section	Section Title	Applicability	Comments/Rationale	Requirements
JPR 8080.5	MP-19	Spacecraft Material - Restriction on Use of Polyvinyl Chloride	Not Applicable	Cancelled	
JPR 8080.5	MP-20	Titanium or its Alloys - Prohibited Use with Oxygen	Not Applicable	Cancelled	
JPR 8080.5	MP-21	Beryllium - Restricted Use within Crew Compartment(s)	Not Applicable	Cancelled	
JPR 8080.5	MP-22	Brazed Joints - Identification Marks	Not Applicable	Cancelled	
JPR 8080.5	MP-23	Pressure Vessels - Materials Compatibility and Vessel Qualification Test	Not Applicable	Cancelled	
JPR 8080.5	MP-24	Cadmium - Restriction on Use	Not Applicable	Cancelled	
JPR 8080.5	MP-25	Pressure Vessels - Non-destructive Evaluation Plan	Not Applicable	Cancelled	
JPR 8080.5	MP-26	Repair of Sandwich - Type Structures	Not Applicable	Cancelled	
JPR 8080.5	MS-1	Equipment containers - Design for Rapid Spacecraft Decompression	Applicable		R.LIDS.0027, R.LIDS.0101, R.LIDS.0103
JPR 8080.5	MS-2	Alignment, Adjustment, and Rigging of Mechanical Systems	Applicable		
JPR 8080.5	MS-3	Wire bindles - Protective Coating	Not Applicable	Reclassified as E-25	
JPR 8080.5	MS-4	Crew Hatches	Not Applicable	No relative hardware on iLIDS.	
JPR 8080.5	MS-5	Threaded Fasteners	Applicable		
JPR 8080.5	MS-6	Exposed Sharp Surfaces or Protrusions	Not Applicable	Cancelled	
JPR 8080.5	MS-7	Windows and Glass Structure	Not Applicable	No relative hardware on iLIDS.	
JPR 8080.5	MS-8	Penetration of Inhabited Spacecraft Compartments	Not Applicable	No relative hardware on iLIDS.	
JPR 8080.5	MS-9	Positive Indication of Status for Mechanisms	Applicable		

Standard	Section	Section Title	Applicability	Comments/Rationale	Requirements
JPR 8080.5	MS-10	Functional Doors That Operate in Flight	Not Applicable	Cancelled	
JPR 8080.5	MS-11	Meteoroid and Orbital Debris Protection Levels for Structures	Not Applicable	iLIDS will not be performing MMOD impact updates to risk assessments based on unknown mission profiles. iLIDS requirement [R.LIDS.0295] carries a specific PNP value relayed to host vehicle and mission profile.	
JPR 8080.5	MS-12	Spacecraft Recovery Hoist Loops	Not Applicable	No relative hardware on iLIDS.	
JPR 8080.5	MS-13	Lifting and Hoisting Ground Support Equipment Identification	Not Applicable	Cancelled	
JPR 8080.5	MS-14	Structural Analysis	Applicable		R.LIDS.0027
JPR 8080.5	MS-15	Fluid Systems - Method of Joining Metallics	Not Applicable	iLIDS has no fluid transfer requirements.	
JPR 8080.5	MS-16	Pressure Vessels - Negative Pressure Damage	Not Applicable	iLIDS is not a pressure vessel.	
JPR 8080.5	P-1	Pyrotechnic Devices - Arming and Disarming	Not Applicable	iLIDS design does not have the capability to arm or disarm pyros.	
JPR 8080.5	P-2	Pyrotechnic Devices Preflight Verification Tests	Applicable		
JPR 8080.5	P-3	Electrical Circuit Wire Splicing	Not Applicable		
JPR 8080.5	P-4	Pyrotechnic Devices - Packaging Material	Not Applicable		
JPR 8080.5	P-5	Pyrotechnic Devices - Identification Requirements	Applicable		
JPR 8080.5	P-6	Protection of Electrical Circuitry for the NASA Standard Initiator	Applicable		
JPR 8080.5	P-7	Pyrotechnic Devices Color Coding Requirements	Not Applicable		

Table C-2 - To Be Resolved/Determined/Specified (TBR/D/S) Items

TBR/D/S ID	Identity	Title
TBR-212	R.LIDS.0202 R.LIDS.1113 R.LIDS.1138	On-orbit life for sun hours
TBS-217	R.LIDS.1001	Berthing Concept of Operations
TBS-218	R.LIDS.0183	Ionizing Radiation
TBR-220	R.LIDS.0103 R.LIDS.1118	Depress/Repress Rate

Table C-3 - iLIDS Configuration Applicability

The following table defines requirements that are unique to specific iLIDS configurations (i.e. -301, -302, etc.). All other requirements are applicable to all configurations.

Applicability	iLIDS (-301)	iLIDS (-302)
R.LIDS.0001		
R.LIDS.0003		
R.LIDS.0004		
R.LIDS.0006		
R.LIDS.0008		
R.LIDS.0009		
R.LIDS.0010		
R.LIDS.0011		
R.LIDS.0012		
R.LIDS.0014		
R.LIDS.0017		
R.LIDS.0019		
R.LIDS.0020		
R.LIDS.0024		
R.LIDS.0024.1		
R.LIDS.0024.2		
R.LIDS.0026		
R.LIDS.0027		
R.LIDS.0029		
R.LIDS.0030		
R.LIDS.0034		
R.LIDS.0037		
R.LIDS.0038		
R.LIDS.0041	X	
R.LIDS.0043		
R.LIDS.0044		
R.LIDS.0046		
R.LIDS.0047		
R.LIDS.0050		
R.LIDS.0051		
R.LIDS.0052		
R.LIDS.0054		
R.LIDS.0055		
R.LIDS.0056		
R.LIDS.0057		
R.LIDS.0058		
R.LIDS.0060		
R.LIDS.0061		

Applicability	iLIDS (-301)	iLIDS (-302)
R.LIDS.0063	X	
R.LIDS.0064		
R.LIDS.0065	X	
R.LIDS.0066		
R.LIDS.0069	X	
R.LIDS.0071		
R.LIDS.0073		
R.LIDS.0075		
R.LIDS.0076		
R.LIDS.0079		
R.LIDS.0080	X	
R.LIDS.0082		
R.LIDS.0082.1		
R.LIDS.0091		
R.LIDS.0100		
R.LIDS.0101		
R.LIDS.0103		
R.LIDS.0104		
R.LIDS.0106		
R.LIDS.0107		
R.LIDS.0108		
R.LIDS.0109		
R.LIDS.0113		
R.LIDS.0116		
R.LIDS.0120		
R.LIDS.0124		
R.LIDS.0127		
R.LIDS.0128		
R.LIDS.0136		
R.LIDS.0137		
R.LIDS.0158		
R.LIDS.0159		
R.LIDS.0162		
R.LIDS.0183		
R.LIDS.0185		
R.LIDS.0186		
R.LIDS.0187		
R.LIDS.0188		
R.LIDS.0189		
R.LIDS.0190		
R.LIDS.0192		
R.LIDS.0197		
R.LIDS.0201		X
R.LIDS.0202	X	
R.LIDS.0203		

Applicability	iLIDS (-301)	iLIDS (-302)
R.LIDS.0206		
R.LIDS.0207		
R.LIDS.0229		
R.LIDS.0256		
R.LIDS.0259		
R.LIDS.0286		
R.LIDS.0294		
R.LIDS.0295	X	
R.LIDS.0298		
R.LIDS.1001		
R.LIDS.1004		
R.LIDS.1005		
R.LIDS.1005.1		
R.LIDS.1006	X	
R.LIDS.1007		X
R.LIDS.1037		
R.LIDS.1042	X	
R.LIDS.1051		
R.LIDS.1056		X
R.LIDS.1060	X	
R.LIDS.1069		
R.LIDS.1074		
R.LIDS.1077		
R.LIDS.1083		
R.LIDS.1084		
R.LIDS.1088		
R.LIDS.1092		
R.LIDS.1093		
R.LIDS.1094		
R.LIDS.1095		
R.LIDS.1096		
R.LIDS.1097		
R.LIDS.1098		
R.LIDS.1099		
R.LIDS.1100		
R.LIDS.1101		
R.LIDS.1102		
R.LIDS.1103	X	
R.LIDS.1104		
R.LIDS.1105		
R.LIDS.1106		
R.LIDS.1107		
R.LIDS.1108.1		
R.LIDS.1108.2		
R.LIDS.1108.3		

Applicability	iLIDS (-301)	iLIDS (-302)
R.LIDS.1108.4		
R.LIDS.1109		
R.LIDS.1111		X
R.LIDS.1112		
R.LIDS.1113		
R.LIDS.1114		
R.LIDS.1115	X	
R.LIDS.1116		
R.LIDS.1117		
R.LIDS.1118		
R.LIDS.1119		
R.LIDS.1120		
R.LIDS.1121		
R.LIDS.1124		
R.LIDS.1125		
R.LIDS.1126		
R.LIDS.1129		
R.LIDS.1130		
R.LIDS.1131		
R.LIDS.1132		
R.LIDS.1133		
R.LIDS.1134		
R.LIDS.1137		
R.LIDS.1138	X	
R.LIDS.1139		X
R.LIDS.1140		
R.LIDS.1141		
R.LIDS.1142		
R.LIDS.1144		
R.LIDS.5003		
R.LIDS.5007		
R.LIDS.5008		
R.LIDS.5009		
R.LIDS.5010		
R.LIDS.5011		
R.LIDS.5012		
R.LIDS.5013		
R.LIDS.5014		
R.LIDS.5021		
R.LIDS.5022		
R.LIDS.5030		
R.LIDS.5033		
R.LIDS.5034		
R.LIDS.5036	X	
R.LIDS.5037		

Applicability	iLIDS (-301)	iLIDS (-302)
R.LIDS.5038	X	
R.LIDS.5050		
R.LIDS.5057		
R.LIDS.5061		
R.LIDS.5062		

Table C-4 - iLIDS PTRS/IDD Associative Requirements

Identity	Title
R.LIDS.0001	iLIDS Structural Attachment on Host Vehicle
R.LIDS.0003	Host Electrical Power Interface - 120 Vdc
R.LIDS.0004	Reception of Commands for Docking
R.LIDS.0014	iLIDS Health and Status During iLIDS Operations
R.LIDS.0024	Transfer of Data and Communications
R.LIDS.0024.1	Ethernet Cable Specification
R.LIDS.0024.2	MIL-STD-1553 Cable Specification
R.LIDS.0027	iLIDS Thermal and Induced Environments
R.LIDS.0029	Structural/Mechanical Attachment
R.LIDS.0030	Transfer of Power
R.LIDS.0041	Leak Rates for iLIDS Feed-Throughs When Mated (Excluding -302)
R.LIDS.0063	Docking Envelope (Excluding -302)
R.LIDS.0080	iLIDS (-301) Mass
R.LIDS.0082	iLIDS Pass-Through Diameter, Petals Removed
R.LIDS.0082.1	iLIDS Pass-Through Diameter, With Petals
R.LIDS.0124	Structural Design and Verification Requirements
R.LIDS.1005	HCS Guide Pins
R.LIDS.1005.1	HCS Guide Pin Receptacles
R.LIDS.1006	Seal on Seal Mating Interface (Excluding -302)
R.LIDS.1007	Seal on Metal Mating Interface (-302)
R.LIDS.1051	Active Thermal System Control
R.LIDS.1056	iLIDS (-302) Mass
R.LIDS.1069	Separation System - Demate
R.LIDS.1103	Pyrotechnic Operated Devices (Excluding -302)
R.LIDS.1111	iLIDS (-302) MMOD
R.LIDS.1113	Leak Rate for iLIDS-to-iLIDS Interface
R.LIDS.1114	Leak Rate for iLIDS-to-Vehicle Interface
R.LIDS.1115	Pyrotechnic Release (Excluding -302)
R.LIDS.1124	iLIDS Active Hook Profile
R.LIDS.1125	iLIDS Passive Hook Profile
R.LIDS.1141	Heater Operation - Blind Mode
R.LIDS.1142	IDSS IDD Compatibility
R.LIDS.5003	iLIDS Volume and Keep Out Zones
R.LIDS.5007	iLIDS Mating Interface Allowable Thermal Differential
R.LIDS.5008	iLIDS Capture Ring in Passive Mode
R.LIDS.5009	iLIDS Capture Ring in Active Mode
R.LIDS.5010	SCS Guide Petal System

Identity	Title
R.LIDS.5011	SCS Guide Petal System Detail
R.LIDS.5012	SCS Ring Dimensions
R.LIDS.5013	SCS Magnet and Striker
R.LIDS.5014	Pre-Capture SCS Compressive Force Resistance
R.LIDS.5021	Umbilical Separation - Passive
R.LIDS.5022	FRAM-Type Connector Pinouts
R.LIDS.5030	iLIDS-to-Host Vehicle Electrical Interface
R.LIDS.5033	Command and Data Handling Interface, Physical Layer Safe Operation Area
R.LIDS.5034	Heater Power and Control
R.LIDS.5036	iLIDS Tunnel Connections-to-Host Vehicle Electrical Interface (Excluding -302)
R.LIDS.5037	Host Interface Connector Pinouts
R.LIDS.5038	iLIDS Box Connections-to-Host Vehicle Electrical Interface (Excluding -302)
R.LIDS.5050	iLIDS-to-iLIDS Thermal Contact Conductance
R.LIDS.5057	iLIDS-to-Host Vehicle Thermal Contact Conductance
R.LIDS.5061	Maximum Temperature Differential for SCS Mating Interfaces
R.LIDS.5062	HCS Compressive Force Resistance During SCS Retraction

Table C-5 - iLIDS Requirements Revision From/To Comparison

The "From/To" table contains red colored text for omissions, blue for new or replaced text, and black for no changes. Strike-through text means the requirement is deleted. The table reflects only items that have been modified between revisions. The column definitions are as follows:

¹ Status

- Accepted: Previously accepted in earlier revision
- Candidate: New requirement from revision
- TBD: Requirement contains a TBD, TBS, or TBR

² Change

- Major: Context change of requirement for reference or new inputs.
- Minor: Editorial changes made that do not impact the context of the requirement. Changes include the addition or deletion of rationale text to further convey meaning.
- Minor – Status Change: Requirements status changed from *Candidate* in Rev F to *Accepted* in Rev G with no other changes impacting the context of the requirement.
- New: New (Candidate) requirement added to current revision.

Identity	Status ¹	Name	Requirement	Rationale	Change ²
R.LIDS.0001	ACCEPTED	iLIDS Structural Attachment on Host Vehicle	The iLIDS shall provide structural mating and sealing to the host vehicle per JSC-65795, NDS IDD, figure NDS-to-Host Vehicle Mounting Interface.	The mating vehicle includes CDA. The host vehicle will provide accommodation to allow iLIDS to attach to the host vehicle. The iLIDS-to-host vehicle is secured/attached by fasteners. See Figure: iLIDS-to-Host Vehicle Mounting Interface for a schematic of the mounting interface. The iLIDS will provide the fasteners for this interface. The iLIDS mechanism will be provided as Government Furnished Equipment. Refer to JSC-65795, <u>International Low Impact Docking System (iLIDS) Interface Definition Document (IDD)</u> <u>NDS IDD</u> , for the details of this interface <u>and a schematic of the mounting interface</u> . The interface defined is based on the common interface used for Apollo/Soyuz, Shuttle/Mir, and Shuttle/ISS docking systems.	Minor
R.LIDS.0003	ACCEPTED	Host <u>Vehicle</u> Electrical Power Interface -120 Vdc	The iLIDS (-301, -302) shall operate with host vehicle power of 120 Vdc <u>or 28 Vdc</u> in accordance with JSC-64599, iLIDS Electric Power Quality Description Document, <u>as specified in Table 3.1 1.</u>	An electrical power interface is needed to allow the host vehicle to power the iLIDS. This is the power for iLIDS consumption, which is not to be confused with the host vehicle pass-through power to the mating vehicle. Future configurations will allow for other host vehicle power (e.g., 28 Vdc). <u>iLIDS supports host vehicle power of either 120 Vdc or 28 Vdc in configurations as specified in JSC-64599, iLIDS Electric Power Quality Description Document.</u>	Major

Identity	Status ¹	Name	Requirement	Rationale	Change ²
R.LIDS.0004	ACCEPTED	Reception of Commands for Docking	The iLIDS shall receive commands from the host vehicle for all sequences as specified in JSC-65795, NDS IDD, Appendix C- 7 , NDS Commands List .	The host vehicle can send an individual sequence or chain of sequences. JSC-65795 will specify the ordering of sequence; however, it is up to the host vehicle's discretion to send the commands.	Minor
R.LIDS.0006	CANDIDATE ACCEPTED	Docking Termination	The iLIDS shall terminate docking upon receipt of a command from the host vehicle prior to hook activation.	For safety purposes, automated functions such as docking should be designed with an override capability that allows the host vehicle to stop, safe, or assume manual control of the automated function after it was initiated. The point at which the override occurs will differ depending on the function. Some activities may only be taken to a safe state and no manual control is available. The intent is to cover the time span beginning with SCS mechanism release contact and extending through rigidization docking completion. This ability is required for the Vehicle crew, ISS crew, or other Space System operators to control automated functions onboard the Vehicle. It covers the case where the vehicle is unable to achieve capture, wants to back out, reset, and make a second docking attempt. It also covers the case where the crew simply becomes uncomfortable with the safety of proceeding onward with the docking operation, and wishes to halt it and back away.	Minor – Status Change
R.LIDS.0012	ACCEPTED	Command Processing Latency	The iLIDS shall have a command processing latency no greater than 35-80 ms, where the performance measurement is taken from the time the command crosses the host vehicle to iLIDS interface to the time the command is acknowledged across the iLIDS to host interface, by the iLIDS avionics.	An upper bound on command processing latency must be established to drive and manage overall avionics and software system design and end-to-end avionics and software performance. This value is driven by and is the part of the time allocation, allocated to iLIDS, from the max total time (200-580 ms from JSC-65795, NDS IDD) required for a switch from system A to B to take place in the case of a fault requiring primary control being transferred from system A to B. This value is necessary for the host vehicle to control total execution latency and assures that the commands will be received, interpreted and acknowledged in the required period. <u>The 80 ms allocated to the iLIDS is distributed between the Control System Software (35 ms for receipt and 35 ms for return) and the avionics hardware (5 ms for receipt and memory write and 5 ms for read and return).</u> See also R.LIDS.1116 and R.LIDS.1137.	Major
R.LIDS.0014	ACCEPTED	iLIDS Health and Status During iLIDS Operations	The iLIDS shall generate and provide health and status information to the host vehicle during iLIDS operations as specified in JSC-65795, NDS IDD, Appendix C- D – NDS-MSID .	This includes generic health and status data as well as data from safety and mission critical functions. This requirement meets the intent of SSP 50021, Safety Requirements Document, Section 3.3.6.1.5.2 and SSP 41000, System Specification for the International Space Station, section 3.3.6.4.	Minor

Identity	Status ¹	Name	Requirement	Rationale	Change ²
R.LIDS.0017	ACCEPTED	Communications with the Host Vehicle (EIA-422-B)	The iLIDS shall communicate with the host vehicle per the electrical characteristics specified in ANSI/TIA/EIA-422-B.	This standard provides reliable serial communications. The iLIDS has requirements to be able to communicate in either EIA-422-B or MIL-STD-1553B, but not both, to a single host vehicle. The host vehicle supplied interfacing connector to iLIDS can only be wired for one of the two communication protocol types.	Minor
R.LIDS.0024.1	ACCEPTED	Ethernet Cable Specification	The iLIDS umbilical cabling for 100 BASE-TX network segments shall be constructed using shielded twisted pair Category 5e components in accordance with ANSI/TIA/EIA 568B.2, Annex N , Commercial Building Telecommunications Cabling Standard, Part 2: Balanced Twisted-Pair Cabling Components, of with a maximum physical cable length not to exceed 4 feet.	Ethernet cable for flight hardware is to be constructed using approved standards.	Minor
R.LIDS.0026	ACCEPTED	Bonding	The iLIDS to host vehicle interface shall meet Class R bonding requirements in accordance with NASA-STD-4003, Electrical Bonding for NASA Launch Vehicles, Spacecraft, Payloads, and Flight Equipment.	The mating vehicle includes the CDA. Adherence to approved standards.	Minor
R.LIDS.0027	ACCEPTED	iLIDS Thermal and Induced Environments	The iLIDS shall meet all of its functional and performance requirements during and after exposure to the loads defined in JSC-65970, iLIDS Thermal and Induced Environments (iLIDS TIES).	The iLIDS will meet the loads defined in JSC-65970, iLIDS TIES. JSC-65970 contains loads for launch, in-flight, docking/berthing, structural limits, and postcapture, thermal, among others. JSC-65970 will specify which loads are functional during and/or after vs. survival only. <u>The iLIDS will be capable of meeting launch loads with the active hooks in the open configuration, umbilicals and separators retracted, the soft capture system locked down, and with soft capture sensors, ready-to-hook sensors, and undocking complete limit switches not depressed.</u>	Minor
R.LIDS.0029	ACCEPTED	Structural/Mechanical Attachment	The iLIDS shall provide an interface with 24 attachment points per JSC-65795, NDS IDD, figure HCS Hook Configurations and figure HCS Docking Interface where 12 active hooks on one system are nominally closed to engage 12 passive hooks on the mating system.	The mating vehicle includes the CDA. The 24 points allows for nominal 12 hook pressurized/mated load carrying capability or enhanced 24 hook load capability. Alternatively, the passive hooks allow for a mated vehicle with active hooks to provide redundancy for hard mate in the event of a failure to hook.	Minor
R.LIDS.0034	ACCEPTED	Automatic Umbilical Demating	The iLIDS-to-iLIDS umbilical interface shall automatically demate during undocking operations.	The mating vehicle includes the CDA. The umbilicals for power, data, etc. are intended to demate without crew intervention during the undocking sequence. This facilitates emergency undocking scenarios.	Minor

Identity	Status ¹	Name	Requirement	Rationale	Change ²
R.LIDS.0046	ACCEPTED	EVA Sharp Edges	Any iLIDS hardware accessible to the EVA crew within 24 <u>in.</u> ² of an adjacent EVA worksite, excluding the defined iLIDS EVA Keep-out-zone, shall meet the edge, corner, and protrusion requirements in Table 3-1 and Table 3-2 of JSC-28918, EVA Design Requirements and Considerations.	These edge, corner, and protrusion requirements were originally developed to prevent the cutting of the EMU glove. This requirement is in accordance with JSC-28918, EVA Design Requirements and Considerations, Section 3.11.	Minor
R.LIDS.0047	ACCEPTED	EVA Thin Materials	The iLIDS materials less than 0.08 <u>in.</u> (2.032 <u>mm</u>) thick that are used in a location accessible to EVA, edge radii shall be greater than 0.003 <u>in.</u> (0.0762 <u>mm</u>), and exposed edges shall be uniformly spaced, not to exceed 0.5 <u>in.</u> (1.27 <u>cm</u>) gaps, flush at the exposed surface plane and shielded from direct EVA interaction.	These edge and corner requirements were originally developed to prevent the cutting of the Extravehicular Mobility Unit (EMU) glove. This requirement is in accordance with JSC-28918, EVA Design Requirements and Considerations, Section 3.11.2 and modified to represent the correct conversion factor.	Minor
R.LIDS.0052	ACCEPTED	Hardware Protrusion	The iLIDS hardware shall be free of hardware protruding into the translation corridor as shown in Figure 4-6 of JSC-28918, EVA Design Requirements and Considerations, except for translation aids.	Protrusions into the translation path are potential snag points (suit and umbilical tear hazard) and EVA suit impact hazards (puncture hazard). The 109 <u>cm</u> (43 <u>in.</u>) diameter translation path is based upon the EMU, which is a Space Transportation System (STS)/ISS legacy and derives from JSC-28918, EVA Design Requirements and Considerations, Paragraph 4.20.1.1. This requirement is in accordance with JSC-28918, EVA Design Requirements and Considerations, Section 3.17.	Minor
R.LIDS.0079	ACCEPTED	Adjustability of iLIDS Performance Parameters	The iLIDS shall accept software reconfiguration, via commands, of soft capture system controller performance parameters to accommodate capture/attenuation of various mass vehicles within the load set defined in JSC-65970, iLIDS Thermal and Induced Environments (iLIDS TIES).	This requirement will allow iLIDS reconfiguration (through software parameters or mode settings <u>via i-Load</u>). For example, iLIDS can be reconfigured to make the Six Degrees of Freedom (6-DOF) platform load reaction stiffer for a particular mission or docking scenario.	Minor
R.LIDS.0103	ACCEPTED <u>TBD</u>	iLIDS Depress Rate	The iLIDS shall survive a 0.76 psi/sec (5.24 kPa/sec) (<u>TBR-220</u>) depressurization rate over the range of 15.2 psia (104.8 kPa) to 5.5E-12 psia (2.7E-10 Torr) without loss of functionality as specified herein.	The iLIDS must survive all specified natural and induced pressure to ensure operations during design reference missions throughout its life. This is also in accordance with JPR 8080.5, Standard MS-1. The 0.76 psi/sec is the same value in SSP 41004, Common Berthing Mechanism to Pressurized Elements Interface Control Document (ICD).	Major

Identity	Status ¹	Name	Requirement	Rationale	Change ²
R.LIDS.0189	ACCEPTED	IVA Touch Temperature	iLIDS surfaces, which are subject to IVA crewmember contact, shall meet the touch temperature requirements as specified in SSP 50021, Safety Requirements Document, Section 3.3.6.12.1, Internal Volume Touch Temperature. Exception: IVA touch temperature limits may not be met for some time after the two vehicles have completed docking until the warm-up period is complete. The warm-up period will be characterized in JSC 65795, NDS IDD.	iLIDS internal surface temperatures must be maintained within the touch temperature limits to prevent crewmember injury from continuous and momentary contact.	Minor
R.LIDS.0190	ACCEPTED	IVA Labeling	The iLIDS shall provide labels for crew interfaces, in accordance with SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T).	This is to allow for identification of relevant features.	Minor
R.LIDS.0201	ACCEPTED	On-Orbit Design Life - Long Duration (-302)	The iLIDS (-302) shall be designed to meet a minimum of 15 years of low earth orbit design life without maintenance.	The current manifest shows a 10-year ISS life after CDA adapter delivery. In order to avoid recertification in the event of ISS life extension, iLIDS (-302) will certify to 15 years. This equates to a Mean Time To Failure (MTTF) of 15 years.	Minor
R.LIDS.0206	ACCEPTED	iLIDS Passive Mode Docking/Undocking Cycles	The iLIDS shall be capable of a minimum of 70 passive mode docking/undocking operations.	This includes 20 ground operations and 50 flight cycles. Fifty cycles is calculated by a 15-year life with 3 missions per year and a margin of 5. The cycles are defined as a full docking/undocking sequence. The 70 Passive mode docking/undocking cycle operations does not account for component-level cycles (i.e., flex-drive, actuators, etc.). Note: Guide petal removal/replacement is not part of the nominal mission therefore the 20 ground cycles and 50 flight cycles do not apply.	Minor
R.LIDS.0256	ACCEPTED	Ground Labeling	Labels used on The the iLIDS, including iLIDS GSE, shall provide labels for ground crew interface controls and indicators, assembly, and handling shall not interfere with on-orbit crew interface labeling and shall be either covered or marked out before flight if the labels provide no function for the crew.	This is in accordance with SSP 50005, International Space Station Flight Crew Integration Standard (NASA-STD-3000/T), Section 9.5.3.1.SSP 57000, Pressurized Payloads Interface Requirements Document, Appendix C, Section C.3.1. Project will endeavor to design labels such that mark-outs are not required.	Major
R.LIDS.1001	CANDIDATE ACCEPTED	Berthing	The iLIDS shall support berthing per To Be Specified (TBS)-217.	The iLIDS provides for vehicle-level docking. The iLIDS design shall not preclude berthing. Refer to Berthing Requirements Document TBS-217 for specific berthing requirements.	Minor – Status Change

Identity	Status ¹	Name	Requirement	Rationale	Change ²
R.LIDS.1060	ACCEPTED	iLIDS Active Mode Docking/Undocking Cycles (Excluding -302)	The iLIDS (excluding -302) shall be capable of a minimum of 24 active mode docking/undocking operations.	This includes 20 ground operation cycles and 4 flight cycles. The cycles are defined as a full docking/undocking sequence. The 24 active mode docking/undocking cycle operations does not account for component-level cycles (i.e., flex-drive, actuators, etc.). <u>Note: Guide petal removal/replacement is not part of the nominal mission therefore the 20 ground cycles and 4 flight cycles do not apply.</u>	Minor
R.LIDS.1069	ACCEPTED	Separation System - Demate	The iLIDS shall provide a separation system capable of providing demate work (energy) between 28.9 ft-lb (4.0 kgf-m) and 35.0 ft-lb (4.8 kgf-m) <u>31.1 ft-lb (4.3 kgf-m) after umbilical and seal demating at zero interface separation.</u>	Docking systems historically have provided a means to accelerate the vehicle away when the structural mate mechanism is released. The system must be capable of demating connectors and overcoming seal stiction in addition to providing the demating energy. <u>Zero interface separation corresponds to hooks fully closed and seals fully compressed.</u> Refer to corresponding requirement ID in JSC-65795, NDS IDD.	Major
R.LIDS.1083	ACCEPTED	General <u>GSE Requirements</u>	All iLIDS GSE shall conform to NASA-STD-5005, <u>Standard for the Design and Fabrication of Ground Support Equipment.</u>	These NASA standards for GSE and GSE hardware must be maintained and controlled as Class I. The standards ensure that uniform engineering practices, methods, and essential criteria are employed in the design of GSE used within NASA.	Minor
R.LIDS.1088	ACCEPTED	Atomic Oxygen	The iLIDS shall withstand the nominal ram Atomic Oxygen (AO) fluence of 5.0 x 10E21 oxygen atoms/cm ² per year to exposed ram surfaces for missions.	The AO environment is applicable to iLIDS internal surfaces and equipment exposed to the external AO environment in the absence of a docked vehicle. The maximum short-term: 4.4 x 10E19 oxygen atoms/cm ² per day for 30 days or less. Values are derived from the natural environment definition given in SSP 30425, Space Station Program Natural Environment Definition for Design.	Minor
R.LIDS.1093	ACCEPTED	iLIDS-to-iLIDS Interface Seal Cleanliness	The iLIDS-to-iLIDS interface, seal gland, and seals shall at a minimum be Visibly Clean (VC) Highly Sensitive in accordance with SN-C-0005, Space Shuttle Contamination Control Requirements upon delivery for integration.	The ISS levies a minimum VC Sensitive level for Space Station components and user hardware per SSP 30426, Space Station External Contamination Control Requirements. iLIDS-to- vehicle iLIDS interface requires a higher VC Highly Sensitive level. This requirement is in accordance with SN-C-0005, Space Shuttle Contamination Control Requirements, Table A.2.	Minor

Identity	Status ¹	Name	Requirement	Rationale	Change ²
R.LIDS.1103	ACCEPTED	Pyrotechnic Operated Devices (Excluding -302)	<p>The iLIDS (excluding -302) shall provide pyrotechnic devices designed and tested to the requirements of JSC 62809, Human Rated Spacecraft Pyrotechnic Specification.</p> <p>Exception:</p> <p>a. Exception is taken to JSC 62809 Sections 3.1, 3.2.2, 3.6.18, 3.6.19, 3.6.20, 3.6.24.1, 3.6.24.2, 3.6.24.3, 3.6.26.1, 4.1.3, 4.4.9, 4.5.1.6, 4.5.2.4, 4.5.2.5, 7.3.3, 7.3.4, 8.1, 8.2, 8.2.4, 8.3 to 8.3.6, 8.4.7, 8.5.1, and 8.5.2. Sections noted are not verifiable by the iLIDS project.</p> <p>b. Exception is taken to JSC 62809 Section 3.5.3. Procurement of hexanitrostilbene (HNS) explosive materials shall be in accordance with JSC 65877, Specification for HNS Explosive.</p>	iLIDS pyrotechnic devices must meet pyrotechnic requirements to ensure safe pyrotechnic design and operation. This requirement is in accordance with SSP 50021, Safety Requirements Document, Section 3.3.6.5.1.3.	Major
R.LIDS.1108.4	CANDIDATE ACCEPTED	IVA Toolbox Compatibility	iLIDS mounting fasteners used on guide petals and electrical boxes shall be selected to be compatible with IVA tool box assembly part number SEG33113668-301.	This requirement adheres to approved standards to support on-orbit maintenance. The standard tool list is comprised of tools to be used for Orbital Replacement Unit (ORU) removal and replacement. The IVA tool box is in accordance with JSC 28533, ISS Catalogue of IVA GFE FCE.	Minor – Status Change
R.LIDS.1113	TBD	Leak Rate for iLIDS-to-iLIDS Interface	The iLIDS-to-iLIDS interface shall have a maximum of 0.0025 lbm dry air/day (0.0011 kg air/day) leakage at vestibule pressurization of 14.7 psia (101 kPa) and an external vacuum pressure when mated.	The leakage value assumes 12 HCS hooks fully engaged and derives from a nominal ISS trajectory and exposure to 1E21 atoms/cm2 atomic oxygen and 214 equivalent sun hours (To Be Resolved (TBR)-212) ultraviolet radiation (for a duration of up to 21 days). The atomic oxygen exposure includes both pre-treatment of the seals and on-orbit exposure at 4.4 × 10E19 oxygen atoms/cm2 per day. See also R.LIDS.0041 and R.LIDS.1114.	Minor

Identity	Status ¹	Name	Requirement	Rationale	Change ²
R.LIDS.1116	ACCEPTED	H&S Data Processing Latency	The iLIDS shall have a Health and Status (H&S) data processing latency no greater than 45 ms, where the performance measurement is taken from the time Health and Status (H&S) data is sampled to the time conditioned H&S data crosses the iLIDS to host vehicle interface.	An upper bound on H&S data processing latency must be established to drive and manage overall avionics and software system design and end-to-end avionics and software performance. This value is driven by and is the part of the time allocation, allocated to iLIDS, from the max total time (200 580 ms from JSC-65795 , NDS IDD) required for a switch from system A to B to take place in the case of a fault requiring primary control being transferred from system A to B. If a fault requiring a switch to the redundant string is identified, there is a minimum amount of time to detect, report to the vehicle, and the vehicle to issue a command to switch between controllers in order to maintain safe control of the linear actuators, depending on the mode and state of iLIDS. This switch time is most critical during dock mode capture and attenuation states. See also R.LIDS.0012 and R.LIDS.1137.	Major
R.LIDS.1118	ACCEPTED TBD	iLIDS Repress Rate	The iLIDS shall survive a 0.30 psi/sec (2.07 kPa/sec) (TBR-220) repressurization rate over the range of 5.5E-12 psia (2.7E-10 Torr) to 15.2 psia (104.8 kPa) without loss of functionality as specified herein.	The iLIDS must survive all specified natural and induced pressure to ensure operations during design reference missions throughout its life. This is also in accordance with JPR 8080.5, Standard MS-1. The 0.30 psi/sec is the same value in SSP 41004, Common Berthing Mechanism to Pressurized Elements Interface Control Document (ICD).	Major
R.LIDS.1137	ACCEPTED	Fault Response Performance	The iLIDS shall be capable of detecting any internal fault, notifying the host vehicle of the fault via the H&S data, and executing a fault response command from the host vehicle within 200 580 ms, including 120 500 ms of communication and processing time within the host vehicle.	The iLIDS must be capable of detecting and responding to faults quickly during docking attempts to ensure adequate dynamic performance in the event that system B is needed to complete a docking attempt or in the event a docking attempt abort is needed. iLIDS dynamics simulations will use this 200 580 ms time as the idle time between system A and system B operations and between system B operations and the beginning of a docking attempt abort. The requirement is based on the two associative requirements (R.LIDS.0012 and R.LIDS.1116). The iLIDS will send signals in 35 40 ms and receive in 45 40 ms.	Major
R.LIDS.1142	CANDIDATE ACCEPTED	IDSS IDD Compatibility	The iLIDS shall be compatible with the IDSS IDD Rev A.	The IDSS IDD establishes standards for compatibility across all docking system designs such that they are capable of interfacing and safely docking with one another. The iLIDS design is based on docking interface features and loads specified in the NDS IDD that are also compatible with those specified in the IDSS IDD.	Minor – Status Change

Identity	Status ¹	Name	Requirement	Rationale	Change ²
R.LIDS.1144	CANDIDATE	Undocking Pressure	The iLIDS shall be capable of undocking with residual pressure up to 0.5 psi within the docking vestibule.	The two mated host vehicles together shall provide a minimum of two fault tolerance to an inability to depressurize the docking vestibule to a minimum of 0.5 psi for undocking. The iLIDS needs to ensure undocking capability at worst case residual pressures in the event host vehicles cannot fully depressurize the docking vestibule to vacuum.	New
R.LIDS.5007	ACCEPTED	iLIDS Mating Interface Allowable Thermal Differential	The iLIDS shall achieve hard capture and soft capture within the boundaries of the acceptable temperature regions as defined in JSC-65795, NDS IDD, figure NDS Mating Interface Allowable Thermal Differential for Hard and Soft Capture NDS-Mating-Interface Allowable Thermal Differential for Hard Capture .	Hard capture includes engaging hooks and seal interface. The allowable temperature differential between the sealing interfaces during docking hard capture is restricted. Soft capture includes engagement of the mating guide petals and actuation of soft capture sensors and load cells. The allowable temperature differential between the mating interfaces during docking soft capture is restricted. If the temperatures are not within the defined boundaries, a thermal hold prior to hard latching or soft capture is required until the temperature requirements are satisfied.	Major
R.LIDS.5013	ACCEPTED	SCS Magnet and Striker	The SCS shall employ three magnets and three striker plates distributed across the soft capture ring, as defined in JSC-65795, NDS IDD, figure SCS Magnetic Capture System, with a minimum striker plate rotational compliance of 2 degrees from the X-Y plane.	The iLIDS performs soft capture using electromagnets and magnetic striker plates.	Major
R.LIDS.5014	ACCEPTED	Pre-Capture SCS Compressive Force Resistance	The iLIDS soft capture interface shall have no more than 6 lb compressive force resistance during capture.	The low impact technology SCS requires minimal compressive force resistance across the interface prior to capture. To maximize the benefit of low impact technology, a maximum of 12 lb compressive force resistance is allowed across the interface. This means each side is allowed to have a maximum of 6 lb resistance. This resistance might include magnet strikers compliance mechanisms, the SCS capture sensors, and any other sources of compressive force resistance.	Minor
R.LIDS.5030	CANDIDATE	iLIDS-to-Host Vehicle Electrical Interface	The iLIDS shall provide the electrical connections for the electrical interface between the iLIDS and the host vehicle as defined in JSC-65795, NDS IDD, figure NDS-to-Host Vehicle Electrical Interface.	The IDD figure defines NDS connector to remote mounted box connector interfaces for both power and communication to the iLIDS as well as power and data transfer through iLIDS.	New
R.LIDS.5036	CANDIDATE ACCEPTED	iLIDS Tunnel Connections -to-Host Vehicle Electrical Interface (Excluding -302)	The iLIDS (excluding -302) shall provide electrical connections to the host vehicle as defined in JSC-65795, NDS IDD, figure NDS (excluding -302) Tunnel Connections-to-Host Vehicle Electrical Interface.	The vehicle interface has a separate connector for power and data, unlike the iLIDS umbilical interface, which combines power and data.	Minor

Identity	Status ¹	Name	Requirement	Rationale	Change ²
R.LIDS.5038	CANDIDATE <u>ACCEPTED</u>	iLIDS Box Connections-to-Host Vehicle Electrical Interface (Excluding -302)	The iLIDS (excluding -302) shall provide electrical connections to the host vehicle as defined in JSC-65795, NDS IDD, figure NDS (excluding -302) Box Connections-to-Host Vehicle Electrical Interface.	The IDD figure defines the required host interfaces for both power and data to the iLIDS electrical boxes.	Minor – Status Change
<u>R.LIDS.5062</u>	<u>CANDIDATE</u>	<u>HCS Compressive Force Resistance During SCS Retraction</u>	<u>The iLIDS hard capture interface shall have no more than 18.9 lb compressive force resistance during SCS retraction.</u>	<u>The holding force capability of the SCS decreases due to geometry as it is retracted and reaches a critical point at the HCS ready to hook indication height. A maximum of 37.8 lb compressive force resistance is allowed across the interface at this height. This means each side is allowed to have a maximum of 18.9 lb resistance. This resistance includes the contributions of HCS sensor mechanisms, such as ready to hook and undocking complete limit switch mechanisms, but does not include the effects of dynamic seal compression. The HCS drives dynamic seal compression so the SCS does not account for those effects.</u>	New

Table C-6 - iLIDS JPR 8080.5 Compliance Requirements Revision From/To Comparison

The "From/To" table contains red colored text for omissions, blue for new or replaced text, and black for no changes. Strike-through text means the requirement is deleted. The table reflects only items that have been modified between revisions.

Standard	Section	Section Title	Applicability	Comments/Rationale	Requirements
----------	---------	---------------	---------------	--------------------	--------------